

Product of choice for a multitude of residential, commercial and industrial lighting applications, our 12 V transformer is the most efficient compact-sized lighting transformer on the market today. Rated for both outdoor and indoor use, our solution is designed to respond to the lighting industry's new energy and reliability requirements.

### BEFORE YOU BEGIN

- Verify the label to ensure your product has the proper input voltage and wattage specification for its usage.
- Ensure your product wire markings match the MX LIGHTFORCE 12 V AC wiring diagram.

**12 V  
AC**

25 W - 100 W

DIMMABLE

INDOOR  
OUTDOOR



### STEP 1 MOUNTING

- Install the lighting transformer vertically with the junction box pointing down as shown in diagram.
- Use the two keyholes to mount the product on a backing capable of supporting its weight.
- Open the hinged door
- Punch the knockouts and install strain reliefs.



25 - 60 W

100 W

Lighting Transformer

### STEP 2 CONNECT

For all wire connections use only UL listed wire nuts and connectors of proper size and type.


- Turn power off.
- Route the input wires through a strain relief.
- Connect BLACK and WHITE wires to the 120 V AC line
- Bring the light fixture wires through the open knockout.
- Connect the light fixture wires to the transformer wires.
- Connect the ground wire to the transformer GREEN wire.

For Landscape lighting application, install lighting transformer at least 1 feet above the ground.

### IMPORTANT

**MX LIGHTFORCE 12 V AC lighting transformer must be:**

- installed by qualified electricians and in accordance with Article 450 of the National Electric Code.
- installed in a well-ventilated area, free from explosive gases and vapors. Proper operation requires for free flow of air.
- grounded in accordance with the National Electric Code.

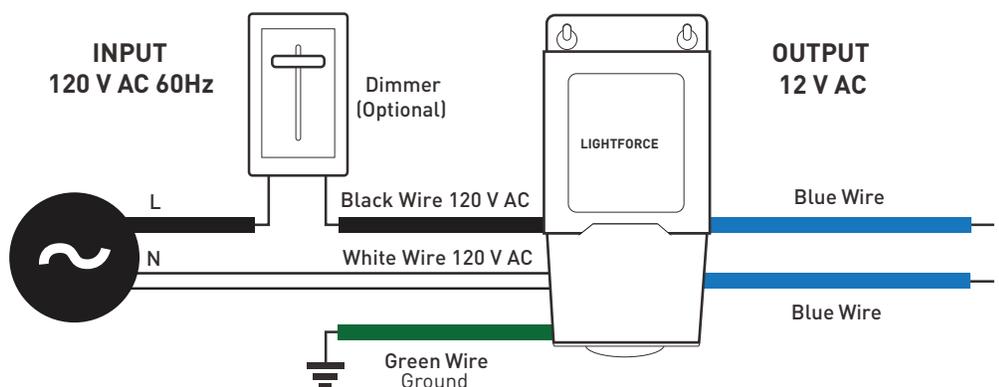

The content of this document are subject to change without notice