



Outline:

- Special materials eliminate all thermal aging issues.
- Flat wire coil for low losses at high frequency
- Low-resistance, and support high currents by using flat wire
- Temperature rise current and saturation current is less influenced by environment.


Features:

- Core material: Composite
- Environmental: RoHS compliant, halogen free
- Weight: 63.17 g
- Moisture Sensitivity: Level (MSL) 1
(unlimited floor life at <30° C /85% relative humidity)
- Operating temperature range: -55°C ~ +150°C
(including coil's self temperature rise).
- Storage temperature range: -40°C ~ +125°C



Application:

- PV inverter/ Industrial control/ New energy
- DC /DC converters/Motherboards/Filter
- High current switching regulators/Polyphase-switching regulators


1 Product Dimensions (mm)



Part No.	130	150-180	250	270-330
Dimension A	1.20	1.00	0.90	0.80
Dimension B	1.80	1.60	1.50	1.40

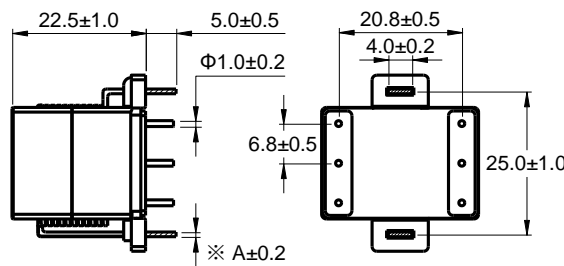

※ Date code will be changed by manufacture date



Schematic

Typical Land pattern


2 Electrical Characteristics

Part No.	Inductance (μH)※1 ±20%	D.C.R. (mΩ)		Isat (A)※2 Typical	I _{rms} (A) ※3 Typical
		Typical	Max.		
TGGE2624A-130MC	13.0	1.90	2.10	35.0	26.0
TGGE2624A-150MC	15.0	2.50	2.90	33.0	25.0
TGGE2624A-180MC	18.0	2.70	3.10	30.0	24.0
TGGE2624A-250MC	25.0	3.60	4.10	28.0	23.0
TGGE2624A-270MC	27.0	3.90	4.50	26.0	22.0
TGGE2624A-330MC	33.0	4.20	4.80	24.0	20.0







All data is tested on 25°C ambient temperature

- Inductance measure condition at 100kHz, 0.1V
- Isat: the actual value of DC current when the Inductance decrease 30% of its initial Value
- I_{rms}: The actual value of DC current when the Temperature rise is ΔT50°C (Ta=25°C)

3 How to Order:

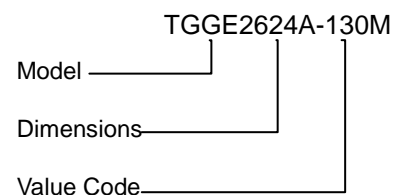


4 Saturation Current vs Temperature Rise Current Curve

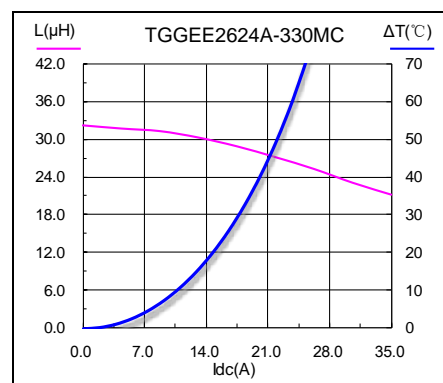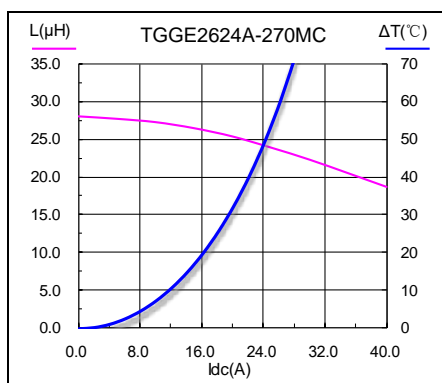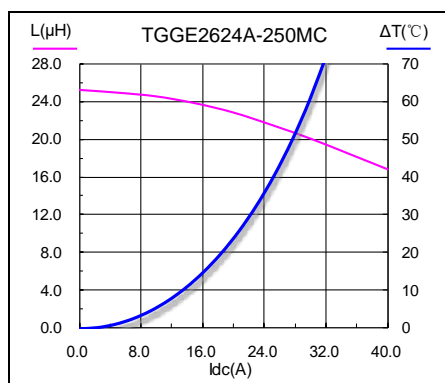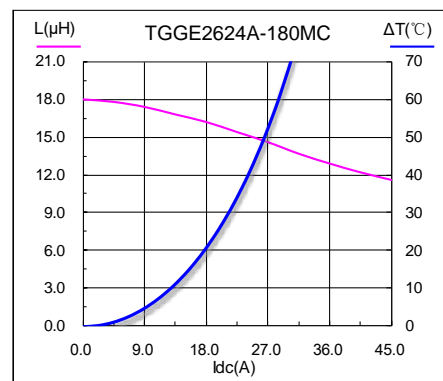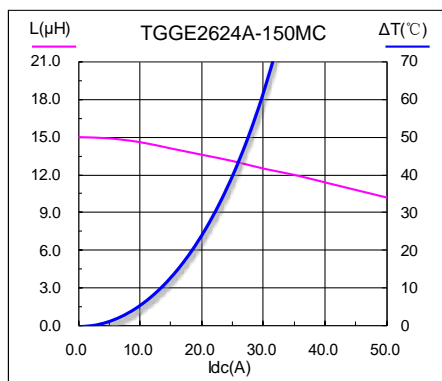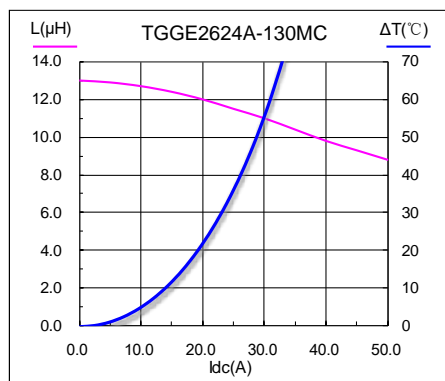


5 Packing Specification

Anhui Tiger Co., Ltd

5.1 Plastic Tray Dimensions (mm)

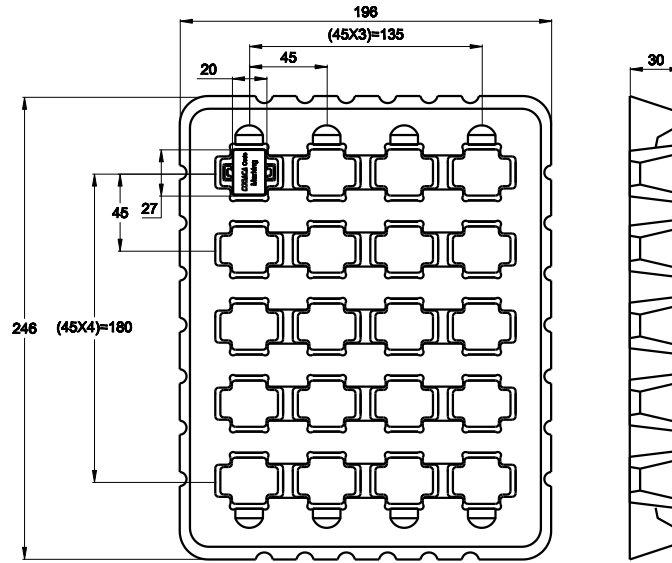

5.2 Packing(mm)

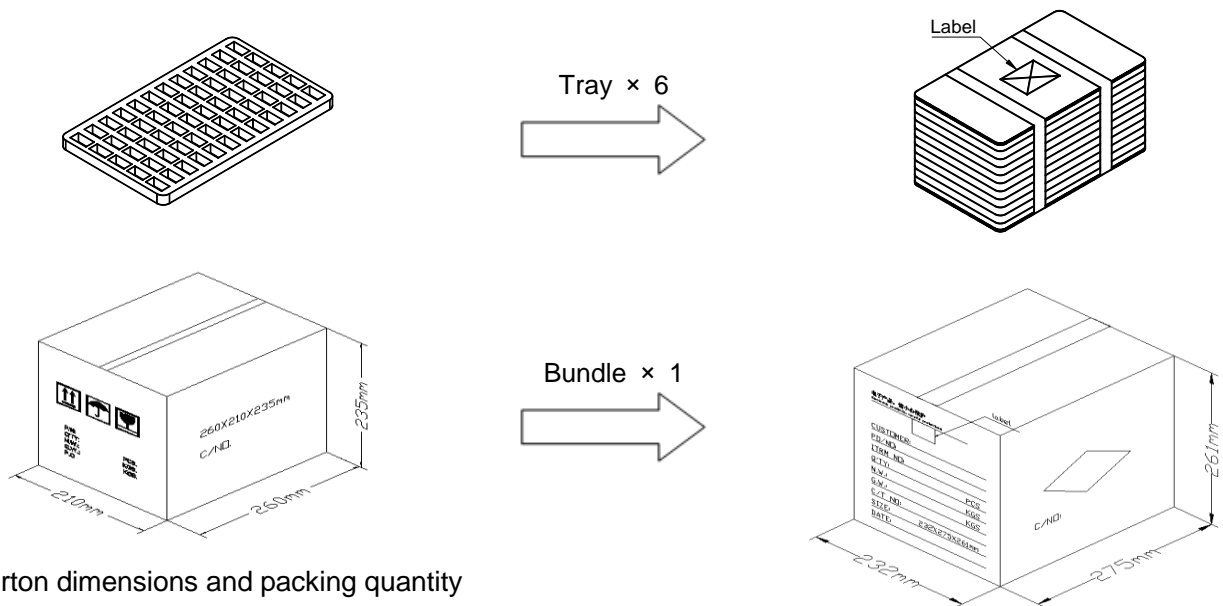

Carton dimensions and packing quantity

■ Inner Carton : 260×210×235mm

■ Out Carton : 275×232×261mm

Product Series	Quantity / Tray	Quantity / Bundle	Out Carton Quantity
TGGE2624A	20pcs	(20×6) = 120pcs	(120×1) = 120pcs

6 Notice of Use

- 6.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 6.2 Product in packing storage condition:temperature 5 ~ 40°C, RH≤ 70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 6.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 6.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 6.5 Always handle products with care.
- 6.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 6.7 When this product will be used on a similar or new project to the original one,
sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 6.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 6.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 6.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 6.11 Refrain from rinsing coils. If necessary, please consult with us.