


TG125

HIGH PERFORMANCE SINGLE STAGE POWER LINE FILTERS

FEATURES



- » Rated currents include **30A, 35A, 45A, 60A, and 80A**
- » Single Stage Line Filter
- » Available with **W** (wireleads), **S** (studs), and **C** (connectors) option
- » High Performance
- » Agency Approved to UL1283/60929, CSA C22.2, EN 60939
- » Y-cap value can be adjusted to fit specifications

ELECTRICAL SCHEMATIC

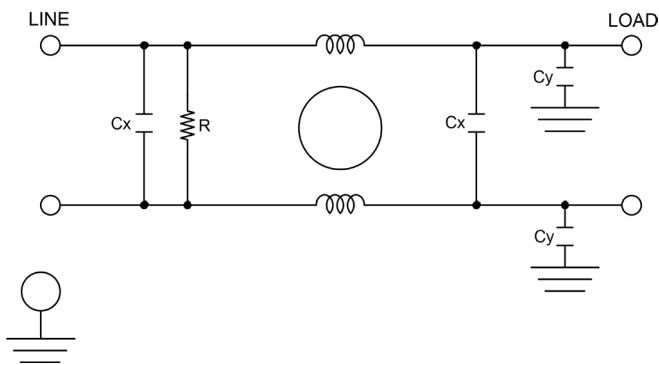

HOW TO ORDER

TG125- X - Y - Z

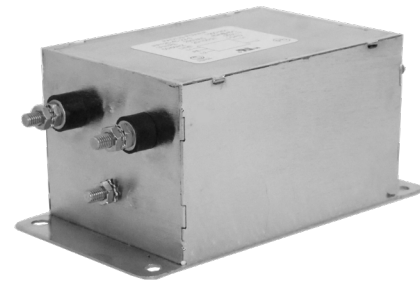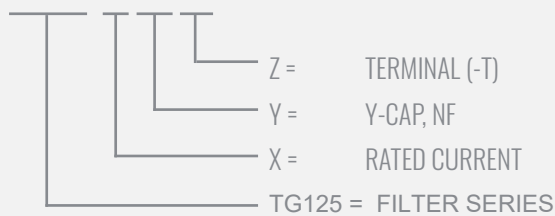

SPECIFICATIONS

OPERATING FREQUENCY	50/60Hz
USABLE FREQUENCY	DC - 400 Hz
MAX. OPERATING VOLTAGE	250V +10%
AMBIENT TEMPERATURE	-25 TO 40°C
CLIMATIC CATEGORY	25/100/21
TERMINALS (-T)	WIRE LEADS
	S: 30/35 A (M4), 45 A (M5),
	60/80 A (M6)
	CONNECTORS
TYP. WEIGHT, LBS (KG)	2.3 (1.0)

TYPICAL LEAKAGE CURRENT

@ 250 VAC 50 Hz	0 - 15.70 mA Max.
@ 120 VAC 60 Hz	0 - 9.04 mA Max.

HIPOT RATINGS

LINE TO GROUND	2700 VDC
----------------	----------

TYPICAL APPLICATIONS

- ✓ Household Appliances
- ✓ Industrial Equipment
- ✓ Medical Devices
- ✓ Communication systems
- ✓ Consumer Electronics
- ✓ Office Automation Devices
- ✓ Data Processing Systems

TG125

HIGH PERFORMANCE SINGLE STAGE POWER LINE FILTERS

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	LEAKAGE CURRENT, mA @ 250V AC, 50 Hz / @ 120V AC, 60 Hz		TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
					(W)INPUT/OUTPUT	(S) INPUT/OUTPUT	(C) INPUT/OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG125-30-0-C	30	0	-	-			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-0-S	30	0	-	-		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-0-W	30	0	-	-	✓			*	*	*
TG125-30-.47-C	30	0.47	0.07	0.04			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-.47-S	30	0.47	0.07	0.04		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-.47-W	30	0.47	0.07	0.04	✓			*	*	*
TG125-30-1-C	30	1	0.15	0.09			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-1-S	30	1	0.15	0.09		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-1-W	30	1	0.15	0.09	✓			*	*	*
TG125-30-2.2-C	30	2.2	0.34	0.19			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-2.2-S	30	2.2	0.34	0.19		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-2.2-W	30	2.2	0.34	0.19	✓			*	*	*
TG125-30-4.7-C	30	4.7	0.73	0.42			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-4.7-S	30	4.7	0.73	0.42		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-4.7-W	30	4.7	0.73	0.42	✓			*	*	*
TG125-30-10-C	30	10	1.57	0.90			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-10-S	30	10	1.57	0.90		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-10-W	30	10	1.57	0.90	✓			*	*	*
TG125-30-22-C	30	22	3.45	1.99			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-22-S	30	22	3.45	1.99		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-22-W	30	22	3.45	1.99	✓			*	*	*
TG125-30-100-C	30	100	15.70	9.04			✓	2.28" (58)	5.59" (142)	1.81" (46)
TG125-30-100-S	30	100	15.70	9.04		✓		2.28" (58)	5.00" (127)	1.81" (46)
TG125-30-100-W	30	100	15.70	9.04	✓			*	*	*
TG125-35-0-C	35	0	-	-			✓	*	*	*
TG125-35-0-S	35	0	-	-		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-0-W	35	0	-	-	✓			*	*	*
TG125-35-.47-C	35	0.47	0.07	0.04			✓	*	*	*
TG125-35-.47-S	35	0.47	0.07	0.04		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-.47-W	35	0.47	0.07	0.04	✓			*	*	*
TG125-35-1-C	35	1	0.15	0.09			✓	*	*	*
TG125-35-1-S	35	1	0.15	0.09		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-1-W	35	1	0.15	0.09	✓			*	*	*
TG125-35-2.2-C	35	2.2	0.34	0.19			✓	*	*	*

TG125

HIGH PERFORMANCE SINGLE STAGE POWER LINE FILTERS

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	LEAKAGE CURRENT, mA @ 250V AC, 50 Hz / @ 120V AC, 60 Hz		TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
					(W)INPUT/OUTPUT	(S) INPUT/OUTPUT	(C) INPUT/OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG125-35-2.2-S	35	2.2	0.34	0.19		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-2.2-W	35	2.2	0.34	0.19	✓			*	*	*
TG125-35-4.7-C	35	4.7	0.73	0.42			✓	*	*	*
TG125-35-4.7-S	35	4.7	0.73	0.42		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-4.7-W	35	4.7	0.73	0.42	✓			*	*	*
TG125-35-10-C	35	10	1.57	0.90			✓	*	*	*
TG125-35-10-S	35	10	1.57	0.90		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-10-W	35	10	1.57	0.90	✓			*	*	*
TG125-35-22-C	35	22	3.45	1.99			✓	*	*	*
TG125-35-22-S	35	22	3.45	1.99		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-22-W	35	22	3.45	1.99	✓			*	*	*
TG125-35-100-C	35	100	15.70	9.04			✓	*	*	*
TG125-35-100-S	35	100	15.70	9.04		✓		2.92" (74.2)	4.42" (112.25)	2" (50.8)
TG125-35-100-W	35	100	15.70	9.04	✓			*	*	*
TG125-45-0-C	45	0	-	-			✓	*	*	*
TG125-45-0-S	45	0	-	-		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-0-W	45	0	-	-	✓			*	*	*
TG125-45-4.7-C	45	0.47	0.07	0.04			✓	*	*	*
TG125-45-4.7-S	45	0.47	0.07	0.04		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-4.7-W	45	0.47	0.07	0.04	✓			*	*	*
TG125-45-1-C	45	1	0.15	0.09			✓	*	*	*
TG125-45-1-S	45	1	0.15	0.09		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-1-W	45	1	0.15	0.09	✓			*	*	*
TG125-45-2.2-C	45	2.2	0.34	0.19			✓	*	*	*
TG125-45-2.2-S	45	2.2	0.34	0.19		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-2.2-W	45	2.2	0.34	0.19	✓			*	*	*
TG125-45-4.7-C	45	4.7	0.73	0.42			✓	*	*	*
TG125-45-4.7-S	45	4.7	0.73	0.42		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-4.7-W	45	4.7	0.73	0.42	✓			*	*	*
TG125-45-10-C	45	10	1.57	0.90			✓	*	*	*
TG125-45-10-S	45	10	1.57	0.90		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)
TG125-45-10-W	45	10	1.57	0.90	✓			*	*	*
TG125-45-22-C	45	22	3.45	1.99			✓	*	*	*
TG125-45-22-S	45	22	3.45	1.99		✓		3.00" (76.2)	5.79" (147)	2.50" (63.5)

TG125

COMPACT SINGLE STAGE POWER LINE FILTERS

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	LEAKAGE CURRENT, mA @ 250V AC, 50 Hz / @ 120V AC, 60 Hz		TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
					(W)INPUT/ OUTPUT	(S) INPUT/ OUTPUT	(C) INPUT/ OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG125-45-22-W	45	22	3.45	1.99	✓			*	*	*
TG125-45-100-C	45	100	15.70	9.04			✓	*	*	*
TG125-45-100-S	45	100	15.70	9.04		✓		3.00"(76.2)	5.79"(147)	2.50"(63.5)
TG125-45-100-W	45	100	15.70	9.04	✓			*	*	*
TG125-60-0-C	60	0	-	-			✓	*	*	*
TG125-60-0-S	60	0	-	-		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-0-W	60	0	-	-	✓			*	*	*
TG125-60-0.47-C	60	0.47	0.07	0.04			✓	*	*	*
TG125-60-0.47-S	60	0.47	0.07	0.04		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-0.47-W	60	0.47	0.07	0.04	✓			*	*	*
TG125-60-1-C	60	1	0.15	0.09			✓	*	*	*
TG125-60-1-S	60	1	0.15	0.09		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-1-W	60	1	0.15	0.09	✓			*	*	*
TG125-60-2.2-C	60	2.2	0.34	0.19			✓	*	*	*
TG125-60-2.2-S	60	2.2	0.34	0.19		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-2.2-W	60	2.2	0.34	0.19	✓			*	*	*
TG125-60-4.7-C	60	4.7	0.73	0.42			✓	*	*	*
TG125-60-4.7-S	60	4.7	0.73	0.42		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-4.7-W	60	4.7	0.73	0.42	✓			*	*	*
TG125-60-10-C	60	10	1.57	0.90			✓	*	*	*
TG125-60-10-S	60	10	1.57	0.90		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-10-W	60	10	1.57	0.90	✓			*	*	*
TG125-60-22-C	60	22	3.45	1.99			✓	*	*	*
TG125-60-22-S	60	22	3.45	1.99		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-22-W	60	22	3.45	1.99	✓			*	*	*
TG125-60-100-C	60	100	15.70	9.04			✓	*	*	*
TG125-60-100-S	60	100	15.70	9.04		✓		3.00"(76.2)	6.97"(177)	2.50"(63.5)
TG125-60-100-W	60	100	15.70	9.04	✓			*	*	*
TG125-80-0-C	80	0	-	-			✓	*	*	*
TG125-80-0-S	80	0	-	-		✓		4.25"(108)	8.72"(221.5)	2.76"(70)
TG125-80-0-W	80	0	-	-	✓			*	*	*
TG125-80-0.47-C	80	0.47	0.07	0.04			✓	*	*	*
TG125-80-0.47-S	80	0.47	0.07	0.04		✓		4.25"(108)	8.72"(221.5)	2.76"(70)
TG125-80-0.47-W	80	0.47	0.07	0.04	✓			*	*	*
TG125-80-1-C	80	1	0.15	0.09			✓	*	*	*

TG125

COMPACT SINGLE STAGE POWER LINE FILTERS





MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	LEAKAGE CURRENT, mA @ 250V AC, 50 Hz / @ 120V AC, 60 Hz		TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
					(W)INPUT/ OUTPUT	(S) INPUT/ OUTPUT	(C) INPUT/ OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG125-80-1-S	80	1	0.15	0.09		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-1-W	80	1	0.15	0.09	✓			*	*	*
TG125-80-2.2-C	80	2.2	0.34	0.19			✓	*	*	*
TG125-80-2.2-S	80	2.2	0.34	0.19		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-2.2-W	80	2.2	0.34	0.19	✓			*	*	*
TG125-80-4.7-C	80	4.7	0.73	0.42			✓	*	*	*
TG125-80-4.7-S	80	4.7	0.73	0.42		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-4.7-W	80	4.7	0.73	0.42	✓			*	*	*
TG125-80-10-C	80	10	1.57	0.90			✓	*	*	*
TG125-80-10-S	80	10	1.57	0.90		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-10-W	80	10	1.57	0.90	✓			*	*	*
TG125-80-22-C	80	22	3.45	1.99			✓	*	*	*
TG125-80-22-S	80	22	3.45	1.99		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-22-W	80	22	3.45	1.99	✓			*	*	*
TG125-80-100-C	80	100	15.70	9.04			✓	*	*	*
TG125-80-100-S	80	100	15.70	9.04		✓		4.25" (108)	8.72" (221.5)	2.76" (70)
TG125-80-100-W	80	100	15.70	9.04	✓			*	*	*

*Contact factory for dimensions.

TG125

COMPACT SINGLE STAGE POWER LINE FILTERS

TG125 MECHANICAL OUTLINES (MM)

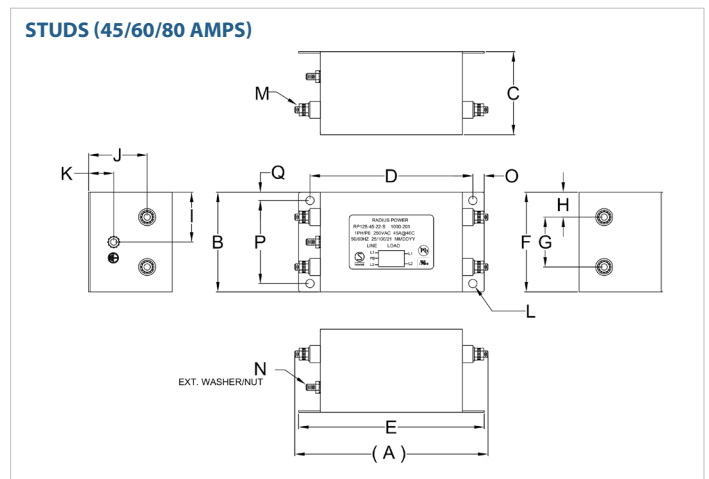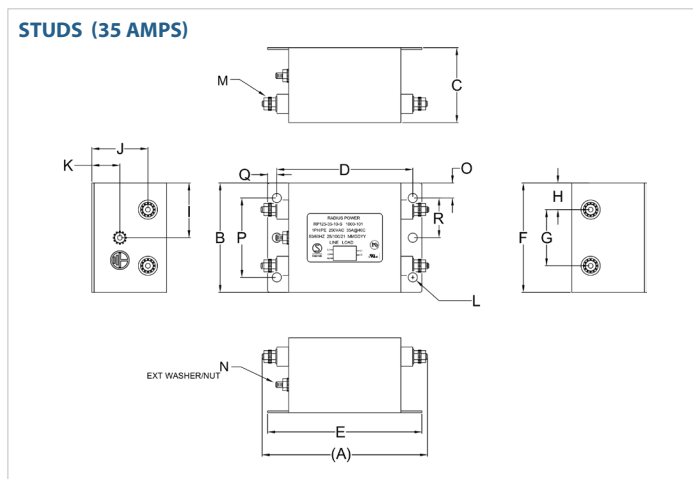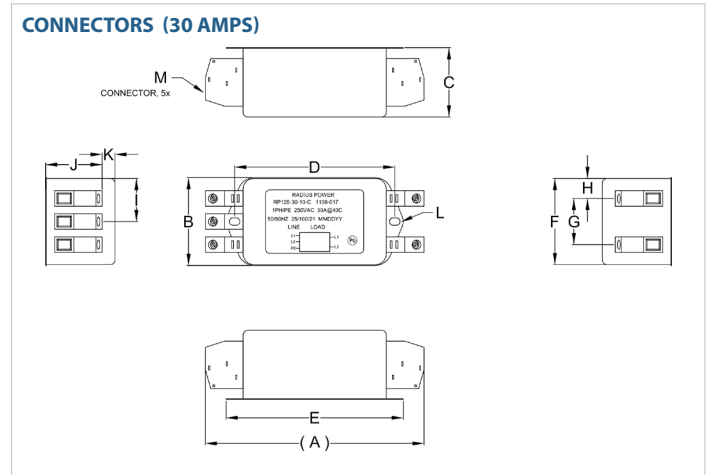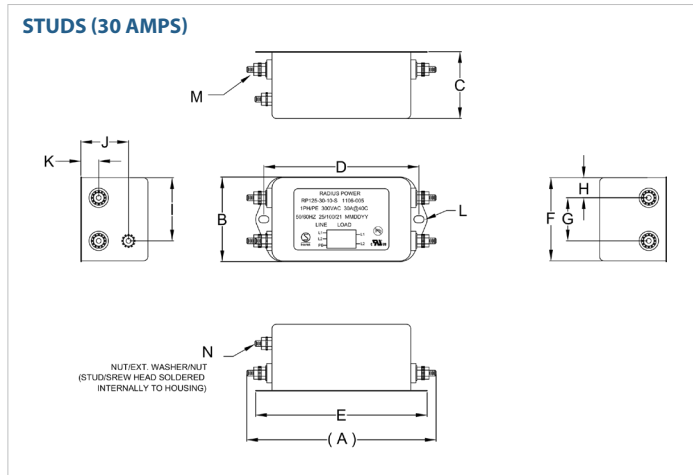

SERIES	(A)	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
STUDS (30A)	5.00" (127)	2.28" (58)	1.81" (46)	4.09" (104)	4.53" (115)	2.24" (57)	1.14" (29)	0.53" (13.5)	1.73" (43.9)	1.26" (32)	0.47" (12)	Ø0.26"x4.8,2x (Ø6.8x4.8, 2x)	STUD, M4, 4x	STUD, GND, M4	N/A	N/A	N/A	N/A
CONNEC. (30A)	5.59" (142)	2.28" (58)	1.81" (46)	4.09" (104)	4.53" (115)	2.24" (57)	2.24" (30)	1.18" (13)	0.51" (28)	1.10" (36.7)	1.44" (8.3)	Ø0.26"x4.8,2x (Ø6.8x4.8, 2x)	DINKLE# PPACN-10AS	N/A	N/A	N/A	N/A	N/A
STUDS (35A)	4.42" (112.25)	2.92" (74.2)	2.00" (50.8)	3.63" (92.3)	4.12" (104.7)	2.92" (74.2)	1.50" (38.1)	0.71" (18.1)	1.46" (37.1)	1.50" (38.1)	0.75" (19)	Ø0.24",6x (Ø6.2, 6x)	STUD, M4, 4x	STUD, GND, M4	0.40" (10.2)	2.12" (53.8)	0.24" (6.2)	1.06" (26.9)
STUDS (45A)	5.79" (147)	3.00" (76.2)	2.50" (63.5)	5.01" (127.3)	5.55" (141)	3.00" (76.2)	1.50" (38.1)	0.75" (19)	1.50" (38.1)	1.75" (44.5)	0.75" (19.1)	Ø0.25",6x (Ø6.35, 4x)	STUD, M5, 4x	STUD, GND, M5	0.34" (8.6)	2.50" (63.5)	0.25" (6.3)	N/A
STUDS (60A)	6.97" (177)	3.00" (76.2)	2.50" (63.5)	5.62" (142.8)	6.25" (158.8)	3.00" (76.3)	1.75" (44.5)	0.63" (15.9)	1.50" (38.1)	1.75" (44.5)	0.65" (16.5)	Ø0.25",4x (Ø6.4, 4x)	STUD, M6, 4x	STUD, GND, M6	0.31" (8)	2.50" (63.5)	0.25" (6.4)	N/A
STUDS (80)	8.72" (221.45)	4.25" (108)	2.76" (70)	7.38" (187.33)	8.00" (203.2)	4.25" (108)	1.75" (44.4)	1.25" (31.8)	2.13" (54)	1.85" (47)	0.91" (23)	Ø0.25",8x (Ø6.4, 8x)	STUD, M6, 4x	STUD, GND, M6	0.31" (7.94)	3.31" (83.95)	0.47" (12)	N/A

TYPICAL TOLERANCE: +/-0.02" (0.50MM)

TG125

COMPACT SINGLE STAGE POWER LINE FILTERS

TYPICAL INSERTION LOSS, dB (50/50 Ohm)

Amps	Freq (MHz)	0.15	0.5	1.0	10	30
30	CM (dB)	16	26	32	45	50
	DM (dB)	34	65	65	70	70
35	CM (dB)	18	28	32	45	50
	DM (dB)	36	65	65	70	70
45	CM (dB)	16	26	32	45	60
	DM (dB)	34	65	65	70	70
60	CM (dB)	16	26	32	45	50
	DM (dB)	40	70	70	70	70
80	CM (dB)	16	26	32	45	50
	DM (dB)	40	70	70	70	70