


TG610

HIGH PERFORMANCE SINGLE STAGE **DC** POWER LINE FILTER

FEATURES


- » Rated currents include **3A, 6A, 10A, 12A, and 20A**
- » Single Stage Line Filter
- » Available with **QD** (tabs), **W** (wires), and **S** (studs) option
- » High Performance Design
- » Agency Approved to UL1283 / 60929, CSA C22.2, EN 60939
- » Y-cap value can be adjusted to fit specification

ELECTRICAL SCHEMATIC

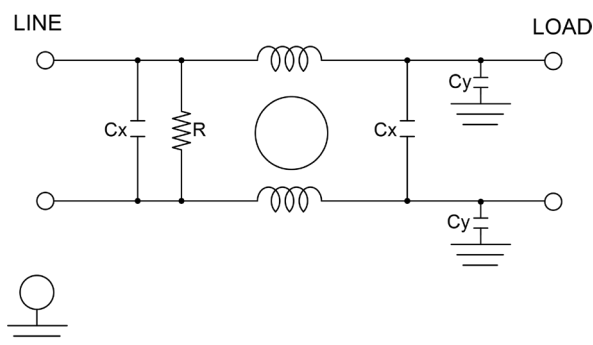

HOW TO ORDER

TG610- X - Y - Z

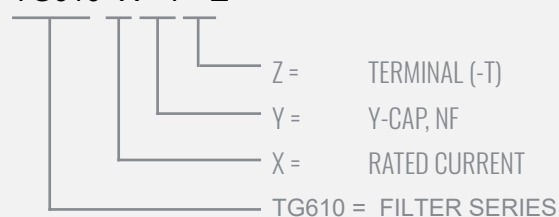

SPECIFICATIONS

MAX. OPERATING VOLTAGE	250V +10%
AMBIENT TEMPERATURE	-25 TO 55°C
CLIMATIC CATEGORY	25/100/21
TERMINALS (-T)	QD TABS: 0.25"
	WIRE LEADS
	STUDS 3-20A (M4)
TYP. WEIGHT, LBS (KG)	0.7 (0.3)

HIPOT RATINGS

LINE TO GROUND	1800 VDC
----------------	----------

TYPICAL APPLICATIONS

- ✓ High power rectifiers
- ✓ Uninterrupted power supplies
- ✓ Inverters
- ✓ VFD
- ✓ PWM

TG610

HIGH PERFORMANCE SINGLE STAGE **DC** POWER LINE FILTER

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
			(QD) INPUT/OUTPUT	(W) INPUT/OUTPUT	(S) INPUT/OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG610-3-4.7-Q D	3	4.7	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-3-4.7-S	3	4.7			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-3-4.7-W	3	4.7		✓		*	*	*
TG610-3-10-Q D	3	10	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-3-10-S	3	10			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-3-10-W	3	10		✓		*	*	*
TG610-3-100-Q D	3	100	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-3-100-S	3	100			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-3-100-W	3	100		✓		*	*	*
TG610-3-1000-Q D	3	1000	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-3-1000-S	3	1000			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-3-1000-W	3	1000		✓		*	*	*
TG610-6-4.7-Q D	6	4.7	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-6-4.7-S	6	4.7			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-6-4.7-W	6	4.7		✓		*	*	*
TG610-6-10-Q D	6	10	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-6-10-S	6	10			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-6-10-W	6	10		✓		*	*	*
TG610-6-100-Q D	6	100	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-6-100-S	6	100			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-6-100-W	6	100		✓		*	*	*
TG610-6-1000-Q D	6	1000	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-6-1000-S	6	1000			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-6-1000-W	6	1000		✓		*	*	*
TG610-10-4.7-Q D	10	4.7	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-10-4.7-S	10	4.7			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-10-4.7-W	10	4.7		✓		*	*	*
TG610-10-10-Q D	10	10	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-10-10-S	10	10			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-10-10-W	10	10		✓		*	*	*
TG610-10-100-Q D	10	100	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-10-100-S	10	100			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-10-100-W	10	100		✓		*	*	*
TG610-10-1000-Q D	10	1000	✓			2.01"(51)	3.45"(88)	1.61"(41)

TG610

HIGH PERFORMANCE SINGLE STAGE **DC** POWER LINE FILTER


MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
			(QD) INPUT/OUTPUT	(W) INPUT/OUTPUT	(S) INPUT/OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG610-10-1000-S	10	1000			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-10-1000-W	10	1000		✓		*	*	*
TG610-12-10-Q D	12	10	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-12-10-S	12	10			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-12-10-W	12	10		✓		*	*	*
TG610-12-100-Q D	12	100	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-12-100-S	12	100			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-12-100-W	12	100		✓		*	*	*
TG610-12-1000-Q D	12	1000	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-12-1000-S	12	1000			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-12-1000-W	12	1000		✓		*	*	*
TG610-20-4.7-Q D	20	4.7	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-20-4.7-S	20	4.7			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-20-4.7-W	20	4.7		✓		*	*	*
TG610-20-10-Q D	20	10	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-20-10-S	20	10			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-20-10-W	20	10		✓		*	*	*
TG610-20-100-Q D	20	100	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-20-100-S	20	100			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-20-100-W	20	100		✓		*	*	*
TG610-20-1000-Q D	20	1000	✓			2.01"(51)	3.45"(88)	1.61"(41)
TG610-20-1000-S	20	1000			✓	2.01"(51)	3.90"(99)	1.57"(40)
TG610-20-1000-W	20	1000		✓		*	*	*

*Contact factory for dimensions.

TG610

HIGH PERFORMANCE SINGLE STAGE **DC** POWER LINE FILTER

TG610 MECHANICAL OUTLINES (MM)

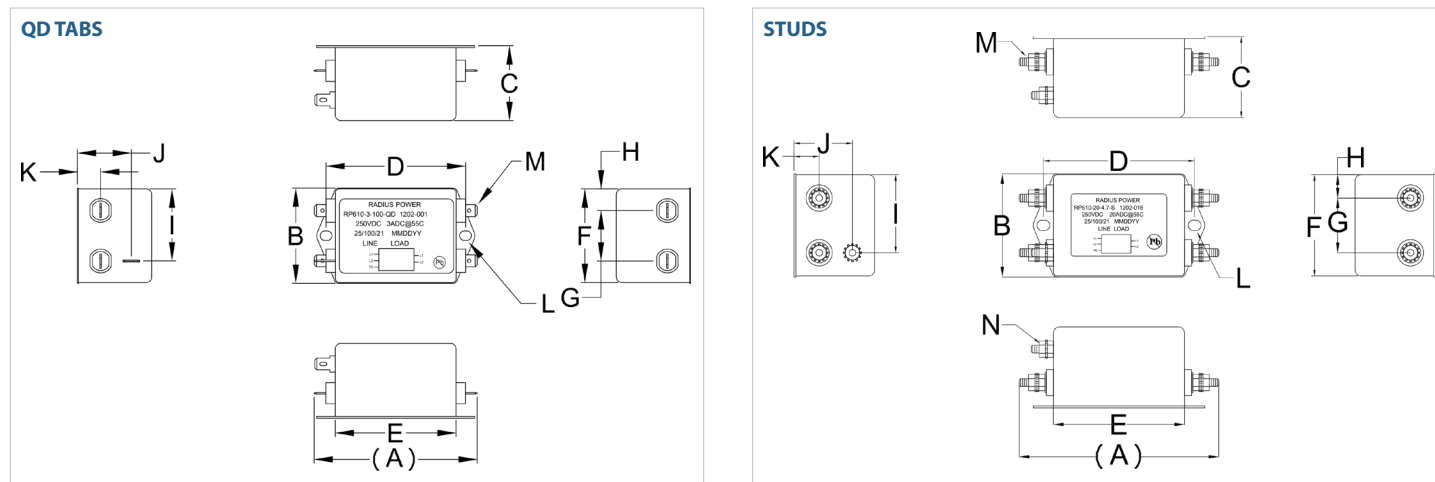

SERIES	(A)	B	C	D	E	F	G	H	I	J	K	L	M	N
QD TABS	3.45" (88)	2.01" (51)	1.61" (41)	2.95" (75)	2.60" (66)	1.97" (50)	1.06" (27)	0.46" (12)	1.52" (39)	1.14" (29)	0.49" (13)	Ø0.25"x0.20", 2x (Ø 6.4x5.1, 2x)	0.25", 5x QD, MALE, 6.35, 5x	N/A
STUDS	3.90" (99)	2.01" (51)	1.57" (40)	2.95" (75)	2.56" (65)	1.97" (50)	1.06" (27)	0.45" (12)	1.52" (39)	1.14" (29)	0.49" (13)	Ø0.25"x0.20", 2x (Ø 6.4x5.1, 2x)	STUD, M5, 4x	STUD, GND, M5

TYPICAL TOLERANCE: +/-0.02" (0.50MM)

TYPICAL INSERTION LOSS, dB (50/50 Ohm)

Amps	Freq (MHz)	0.15	0.5	1.0	10	30
3	CM (dB)	40	55	65	65	60
	DM (dB)	40	60	65	75	70
6	CM (dB)	40	55	65	65	60
	DM (dB)	42	62	65	75	70
10	CM (dB)	40	55	65	65	60
	DM (dB)	45	65	65	75	70
12	CM (dB)	40	55	65	65	60
	DM (dB)	45	65	65	75	70
20	CM (dB)	20	28	34	55	60
	DM (dB)	30	55	58	60	60