


TG615

HIGH PERFORMANCE DUAL STAGE **DC** POWER LINE FILTER

FEATURES


- » Rated currents include **3A, 6A, 10A, and 20A**
- » Dual Stage Line Filter
- » Available with **QD** (tabs), **W** (wires), and **S** (studs) option
- » High Performance Design
- » Agency Approved to UL1283 / 60929, CSA C22.2, EN 60939
- » Y-cap value can be adjusted to fit specification

ELECTRICAL SCHEMATIC

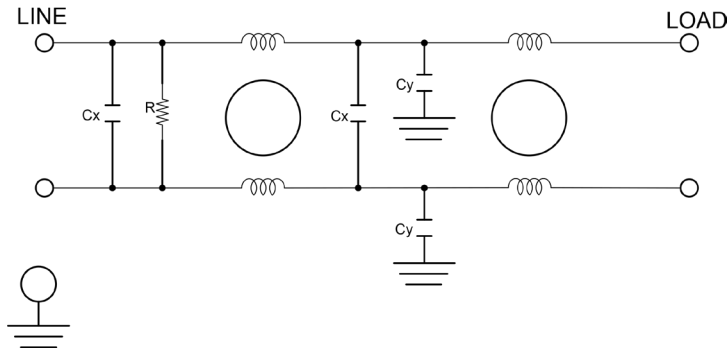

HOW TO ORDER

TG615- X - Y - Z

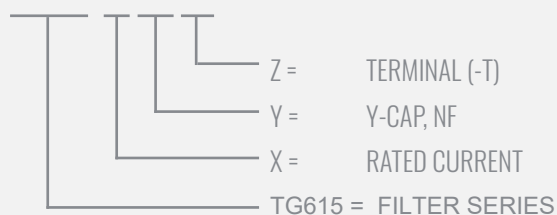

SPECIFICATIONS

MAX. OPERATING VOLTAGE	250V +10%
AMBIENT TEMPERATURE	-25 TO 55°C
CLIMATIC CATEGORY	25/100/21
TERMINALS (-T)	QD TABS: 0.25"
	WIRE LEADS
	STUDS 3-20A (M4)
TYP. WEIGHT, LBS (KG)	0.8 (0.4)

HIPOT RATINGS

LINE TO GROUND	1800 VDC
----------------	----------

TYPICAL APPLICATIONS

- ✓ High power rectifiers
- ✓ Uninterrupted power supplies
- ✓ Inverters
- ✓ VFD
- ✓ PWM

TG615

HIGH PERFORMANCE DUAL STAGE **DC** POWER LINE FILTER

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
			(QD) INPUT/ OUTPUT	(W) INPUT/ OUTPUT	(S) INPUT/ OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG615-3-10-Q D	3	10	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-3-10-S	3	10			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-3-10-W	3	10		✓		*	*	*
TG615-3-100-Q D	3	100	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-3-100-S	3	100			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-3-100-W	3	100		✓		*	*	*
TG615-3-1000-Q D	3	1000	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-3-1000-S	3	1000			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-3-1000-W	3	1000		✓		*	*	*
TG615-6-10-Q D	6	10	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-6-10-S	6	10			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-6-10-W	6	10		✓		*	*	*
TG615-6-100-Q D	6	100	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-6-100-S	6	100			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-6-100-W	6	100		✓		*	*	*
TG615-6-1000-Q D	6	1000	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-6-1000-S	6	1000			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-6-1000-W	6	1000		✓		*	*	*
TG615-10-10-Q D	10	10	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-10-10-S	10	10			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-10-10-W	10	10		✓		*	*	*
TG615-10-100-Q D	10	100	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-10-100-S	10	100			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-10-100-W	10	100		✓		*	*	*
TG615-10-1000-Q D	10	1000	✓			2.24"(57)	4.56"(116)	1.77"(45)
TG615-10-1000-S	10	1000			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-10-1000-W	10	1000		✓		*	*	*
TG615-20-10-Q D	20	10	✓			2.24"(57)	4.61"(117)	1.77"(45)
TG615-20-10-S	20	10			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-20-10-W	20	10		✓		*	*	*
TG615-20-100-Q D	20	100	✓			2.24"(57)	4.61"(117)	1.77"(45)
TG615-20-100-S	20	100			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-20-100-W	20	100		✓		*	*	*
TG615-20-1000-Q D	20	1000	✓			2.24"(57)	4.61"(117)	1.77"(45)


TG615

HIGH PERFORMANCE DUAL STAGE **DC** POWER LINE FILTER

MODEL NO.	RATED CURRENT, A @ 40° C	Y-CAP, nF	TERMINAL OPTIONS			MAX. DIMENSIONS" (MM)		
			(QD) INPUT/ OUTPUT	(W) INPUT/ OUTPUT	(S) INPUT/ OUTPUT	WIDTH	(LENGTH)	HEIGHT
TG615-20-1000-S	20	1000			✓	2.24"(57)	5.00"(127)	1.77"(45)
TG615-20-1000-W	20	1000		✓		*	*	*

*Contact factory for dimensions.

TG615 MECHANICAL OUTLINES (MM)

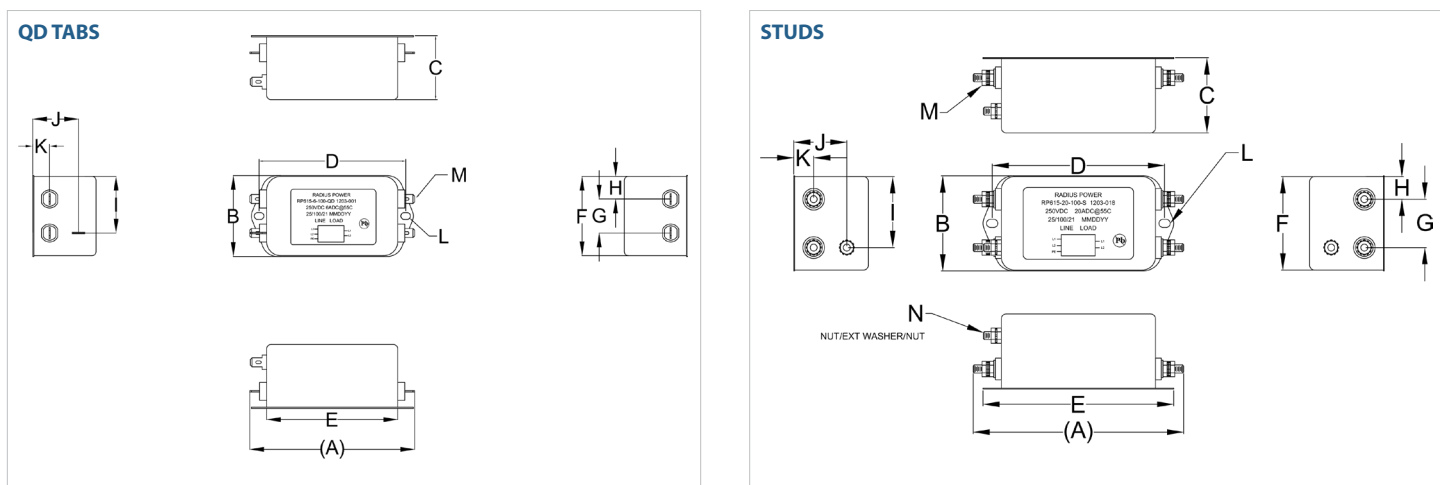

SERIES	(A)	B	C	D	E	F	G	H	I	J	K	L	M	N
QD TABS (3/6/10A)	4.56" (116)	2.24" (57)	1.77" (45)	4.09" (104)	3.66" (93)	2.20" (56)	0.94" (24)	0.63" (16)	1.57" (40)	1.28" (33)	0.47" (12)	Ø0.26", 2x (Ø 6.80, 2x)	0.25", 5x QD, MALE, 6.35, 5x	N/A
STUDS (20A)	5.00" (127)	2.24" (57)	1.77" (45)	4.09" (104)	4.53" (115)	2.20" (56)	1.14" (29)	0.53" (14)	1.67" (43)	1.26" (32)	0.47" (12)	Ø0.26"X0.18", 2x (Ø 6.8x4.8, 2x)	STUD, M5, 4x	STUD, GND, M5
QDTABS (20A)	4.61" (117)	2.24" (57)	1.77" (45)	4.09" (104)	3.66" (93)	2.20" (56)	0.94" (24)	0.63" (16)	1.57" (40)	1.28" (33)	0.47" (12)	Ø0.26"X0.18", 2x (Ø 6.8x4.8, 2x)	0.25", 5x QD, MALE, 6.35, 5x	N/A

TYPICAL TOLERANCE: +/-0.02" (0.50MM)

TG615

HIGH PERFORMANCE DUAL STAGE **DC** POWER LINE FILTER

TYPICAL INSERTION LOSS, dB (50/50 Ohm)

Amps	Freq (MHz)	0.15	0.5	1.0	10	30
3	CM (dB)	60	70	70	52	50
	DM (dB)	50	60	68	60	60
6	CM (dB)	60	70	70	52	50
	DM (dB)	50	60	68	60	60
10	CM (dB)	55	70	70	50	50
	DM (dB)	45	60	60	70	65
20	CM (dB)	40	65	70	52	40
	DM (dB)	34	58	60	65	60