



Designed to meet IEEE802.3ab requirement
 Designed to meet IR 255°C peak requirement
 ROHS Compliant
 Operating temperature range:0°Cto+70°C
 Storage temperature range:-25°Cto+125°C

Electrical Specifications @ 25°C

Part Number	Turn Ratio		OCL (100KHz0.2V)	LK (100KHz0.2V)		DCR		CP
	(1-3):(16-14)	(6-8):(11-19)	16-14=6-8	16-14 (short1-3)	6-8 (short11-9)	1-3=16-14	6-8	P-S
TG16A20	1:1±2%	1:2±2%	1.2mH Min	0.6uH Max	0.6uH Max	0.7ΩMAX.	0.7ΩMAX.	30PFMAX.

Mechanical

Schematics

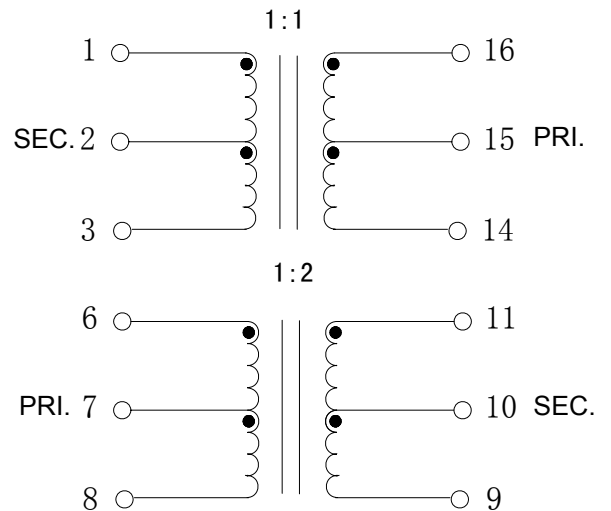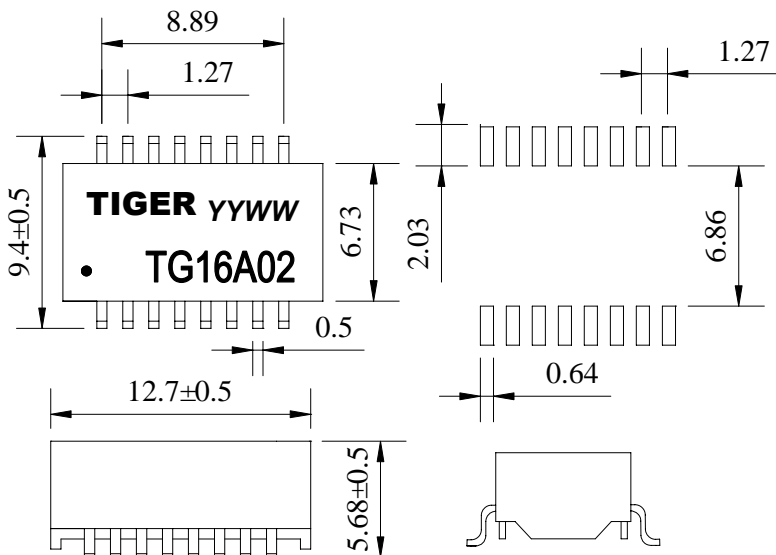

Dimension:mm

Unless otherwise specified,tolerances:±0.25(mm)

Data sheet subject to change without notice

Anhui Tiger Co., Ltd

Tel: 86-13605604993
 sale@tiger-transformer.com

