

**Type**                      **Power**  
**EE20/10.5**            **0.6VA**



**Features**


- Inherently Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B (B=130°C)
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- Weight: 35 grams
- MPQ: 20PCS

**产品特点**

- 固有耐短路保护
- 真空灌封
- 隔离骨架设计及绕线
- 耐温等级: ta50°C/B (B=130°C)
- 工作频率 50/60Hz
- 介电强度 4200Vrms
- 产线全检
- 重量: 35 克
- 最小包装数: 20只


PART NO. 产品型号	Output ta 50°C/B 功率	Prim.V 输入电压	Connrcting Pins 脚位	Operating point sec.±10% 次级工作参数	Connrcting Pins 脚位	No-load voltage ±10% 空载电压
TG2010-U-0060-180-D	0.6W	115V	1--4	18V/16.6mA	5--6	31.5V
				18V/16.6mA	7--8	31.5V

**Electrical Schematic 电气原理图**

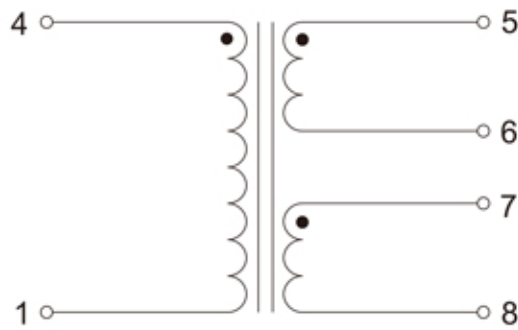

Single Input / Double Output  
单入/双出

**Outline Dimensions 外形尺寸**

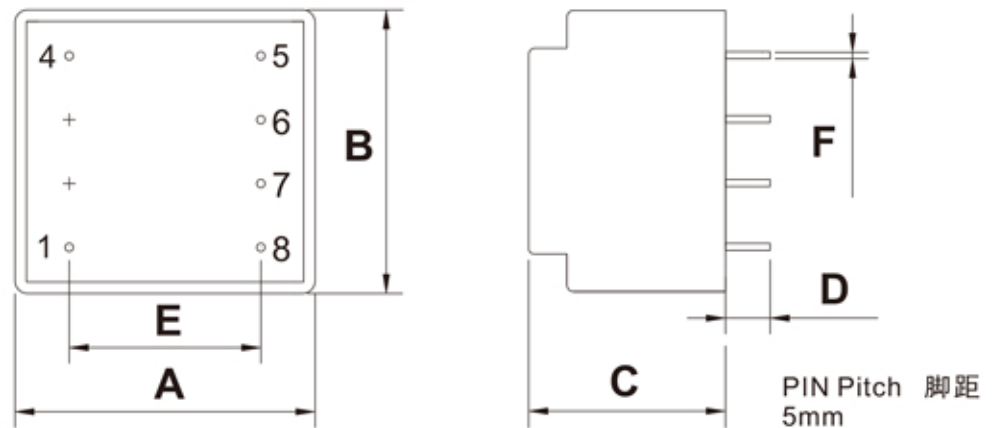

A	B	C	D	E	F
MAX[mm]	MAX[mm]	MAX[mm]	±0.5[mm]	±0.3[mm]	±0.1[mm]
23.5	22.5	20.5	3.5	15	0.6

**Product Show 产品展示**

