

Type EI28/12

Power 1.0 VA

Weight 70 g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Safety transformer/Short circuit proof




**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

| PART NO             | Output ta 70°C/B | Prim.V | Connecting pins | Operating point<br>sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG2812-U-0100-120-D | 1.0W             | 115    | 1--5            | 12V 41.6mA                    | 6--7            | 16.0V                      |
|                     |                  |        |                 | 12V 41.6mA                    | 9--10           | 16.0V                      |

According to

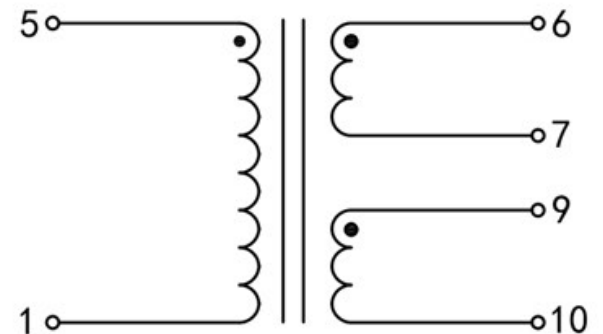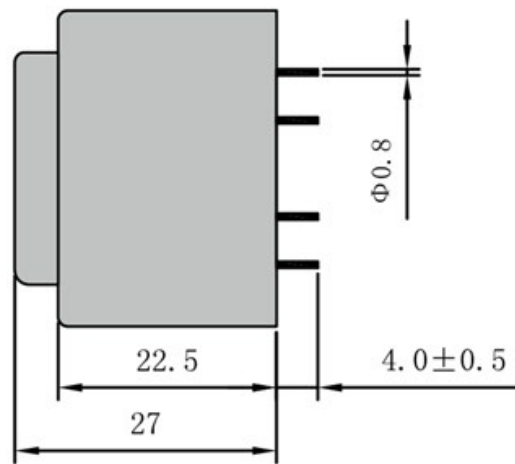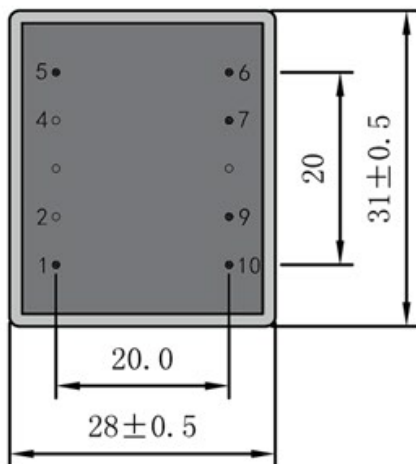

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

