Weight Type EI28/15 Power 1.8 VA 85 g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

## Vacuum filled casting

Split bobbin design winding

## Dielectric strength 4500Vrms

| PART NO             | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|---------------------|------------------|--------|-----------------|----------------------------|-----------------|----------------------------|
| TG2815-E-0180-120-D | 1.8 W            | 230    | 15              | 12V 75.0mA                 | 67              | 16.5V                      |
|                     |                  |        |                 | 12V 75.0mA                 | 910             | 16.5V                      |

According to














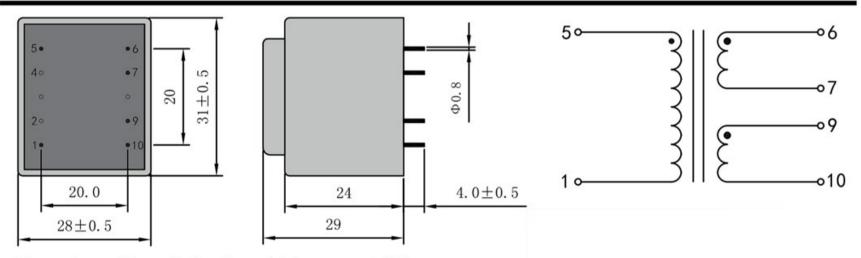

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











