Weight Type EI28/15 Power 1.8 VA 85 g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|---------------------|------------------|--------|-----------------|----------------------------|-----------------|----------------------------|
| TG2815-U-0180-075-D | 1.8 W | 115 | 15 | 7.5V 120.0mA | 67 | 10.3V |
| | | | | 7.5V 120.0mA | 910 | 10.3V |

According to














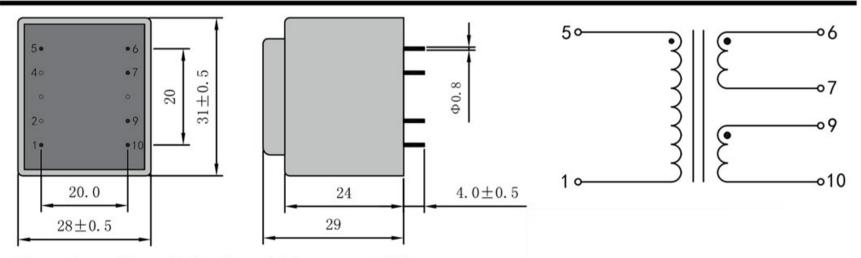

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











