

Type EI28/15

Power 1.8VA

Weight 85g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof




**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

| PART NO              | Output ta 70°C/B | Prim.V | Connecting pins | Operating point<br>sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|----------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG2815-U2-0180-060-S | 1.8 W            | 115    | 1--2            | 6V 300.0mA                    | 7--9            | 8.3V                       |
|                      |                  | 115    | 4--5            |                               |                 |                            |

According to

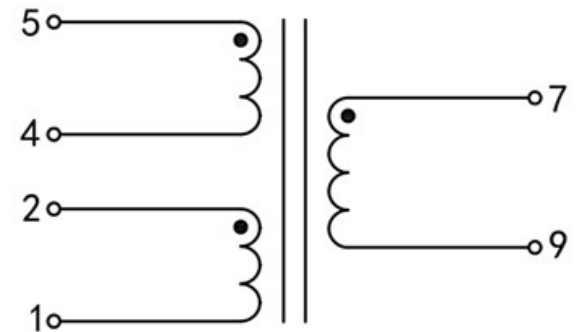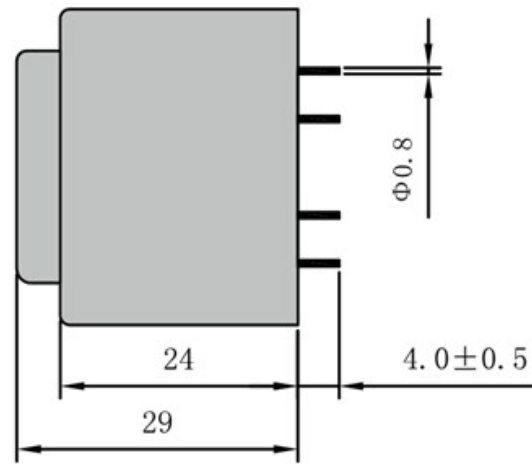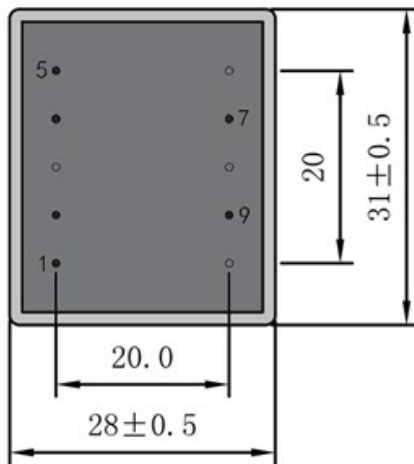

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

