Weight Type EI28/15 1.8VA 85g Power

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG2815-U2-0180-240-D	1.8 W	115	12	24V 37.5mA	67	33.0V
		115	45	24V 37.5mA	910	33.0V

According to














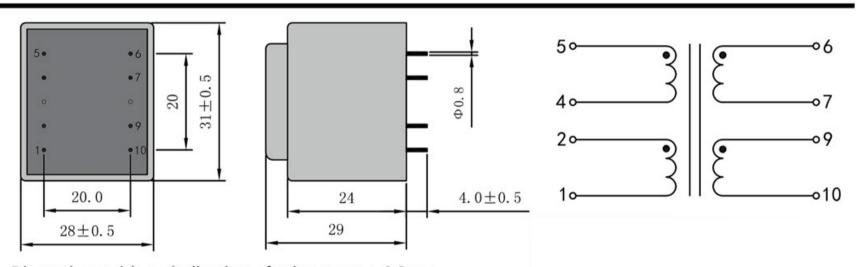

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











