Weight 100 g Type EI28/18 Power 2.3 VA

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG2818-U-0230-120-D	2.3 W	115	15	12V 95.8mA	67	17.6V
				12V 95.8mA	910	17.6V

According to














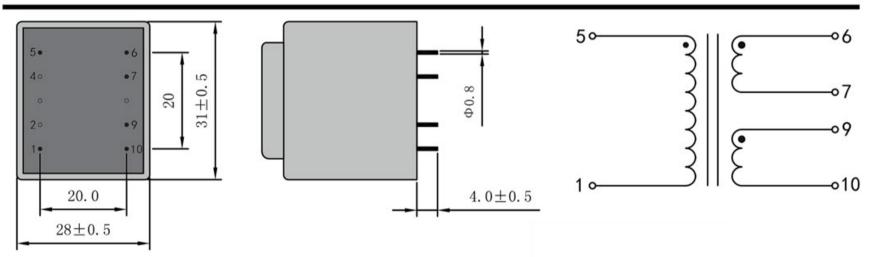

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.













