

Weight 100g Type EI28/18 2.0VA Power

shipping unit per box: 40 PCS

temperature class: ta 70℃/B

Safety transformer/Short circuit proof

## Vacuum filled casting

Split bobbin design winding

## Dielectric strength 4500Vrms

| PART NO              | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|----------------------|------------------|--------|-----------------|----------------------------|-----------------|----------------------------|
| TG2818-U2-0200-120-S | 2.0 W            | 115    | 12              | 12V 166.6mA                | 79              | 17.6V                      |
|                      |                  | 115    | 45              |                            |                 |                            |

## According to














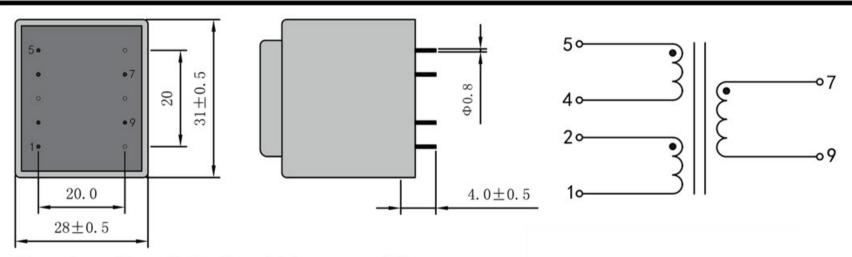

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.













