

Type EI28/18

Power 2.3VA

Weight 100g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof




Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|----------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG2818-U2-0230-150-D | 2.3 W | 115 | 1--2 | 15V 76.6mA | 6--7 | 22.0V |
| | | 115 | 4--5 | 15V 76.6mA | 9--10 | 22.0V |

According to

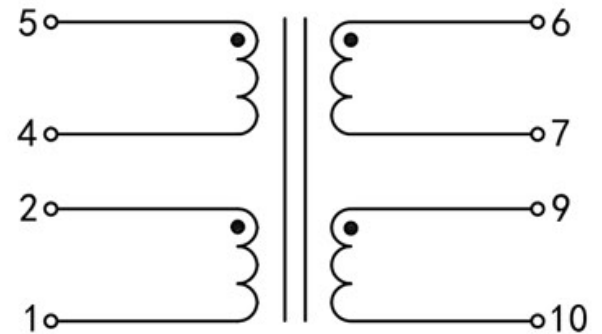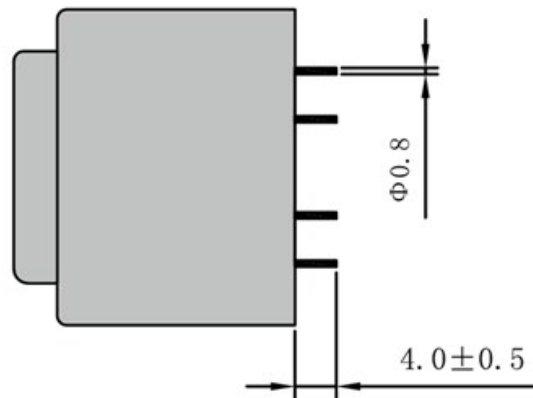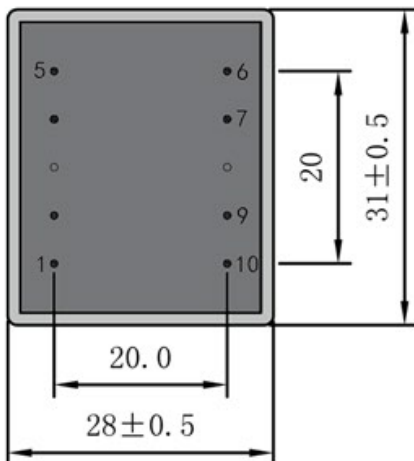

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

