Weight Type 0.8VA 60g Power EI30/8

shipping unit per box: 40 PCS

temperature class: ta 70℃/B

Safety transformer/Short circuit proof

## Vacuum filled casting

Split bobbin design winding

## Dielectric strength 4500Vrms

| PART NO             | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|---------------------|------------------|--------|-----------------|----------------------------|-----------------|----------------------------|
| TG3008-U-0080-075-D | 0.8W             | 115    | 15              | 7.5V 53.3mA                | 67              | 11.2V                      |
|                     |                  |        |                 | 7.5V 53.3mA                | 910             | 11.2V                      |

According to















06

09

o10

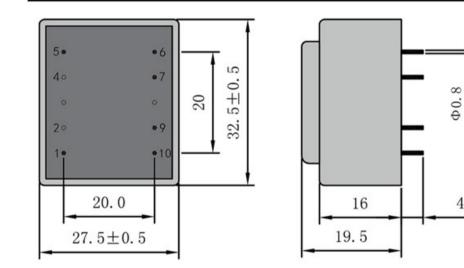

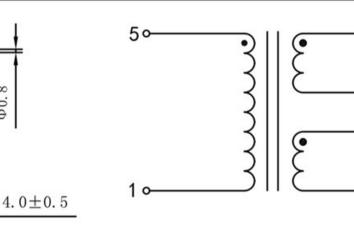

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











