

**Type** EI30/5

**Power** 0.5VA

**Weight** 43g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

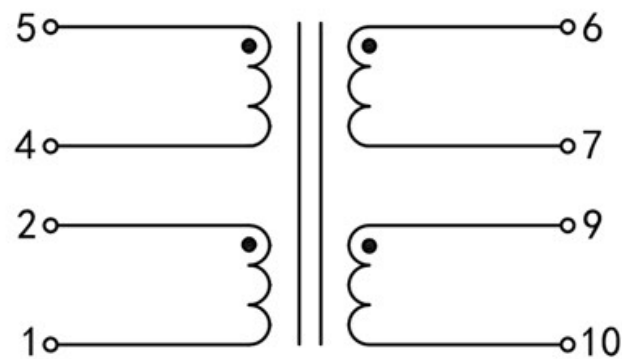
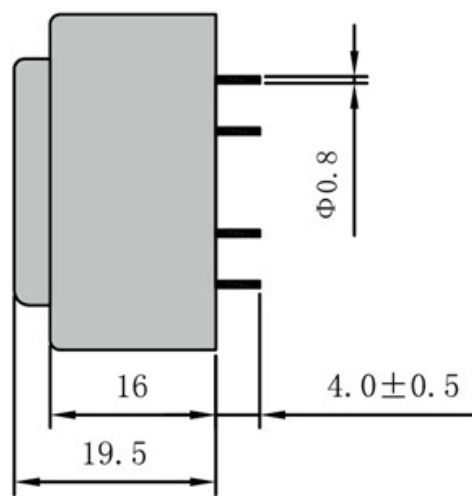
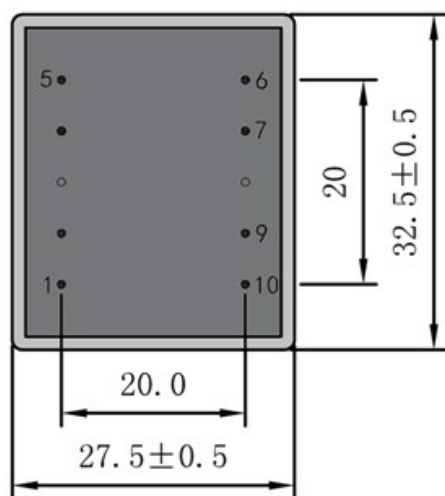
**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. $\pm 10\%$	Connecting pins	No-load voltage V $\pm 10\%$
TG3008-U2-0100-090-D	1.0W	115	1--2	9V 55.5mA	6--7	15.6V
		115	4--5	9V 55.5mA	9--10	15.6V

According to


 Dimensions with no indication of tolerances:  $\pm 0.3\text{mm}$   
 Custom-made transformer also will be welcome.
