

Type EI30/8

Power 1.0VA

Weight 60g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

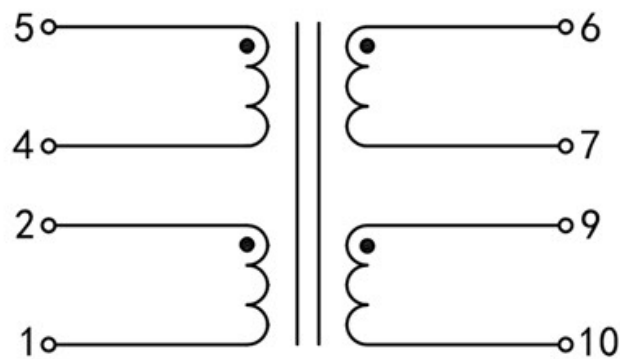
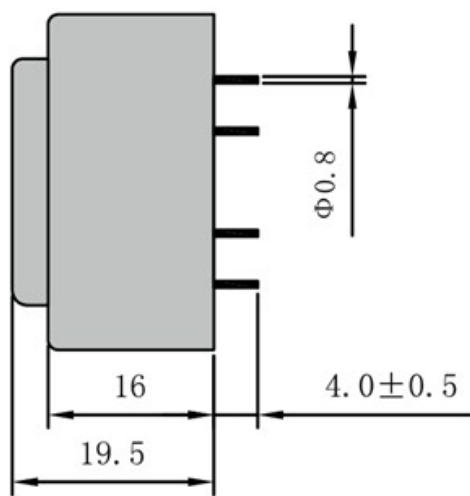
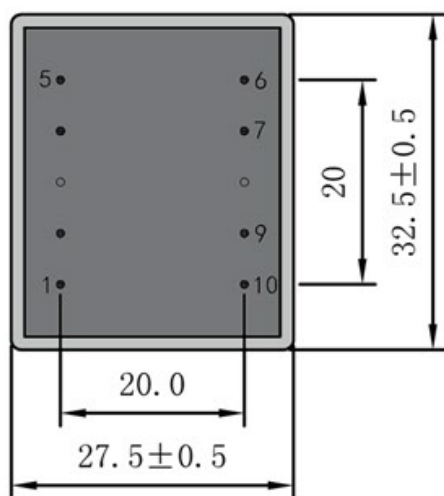
Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. $\pm 10\%$ | Connecting pins | No-load voltage V $\pm 10\%$ |
|----------------------|------------------|--------|-----------------|------------------------------------|-----------------|---------------------------------|
| TG3008-U2-0100-180-D | 1.0W | 115 | 1--2 | 18V 27.7mA | 6--7 | 27.9V |
| | | 115 | 4--5 | 18V 27.7mA | 9--10 | 27.9V |

According to


 Dimensions with no indication of tolerances: $\pm 0.3\text{mm}$
 Custom-made transformer also will be welcome.
