Weight Type EI30/10.5 1.0VA 70g Power

shipping unit per box: 40 PCS

temperature class: ta 70℃/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3010-U-0100-240-D	1.0W	115	15	24V 20.8mA	67	32.8V
				24V 20.8mA	9-10	32.8V

Approved by














-06

۰7

010

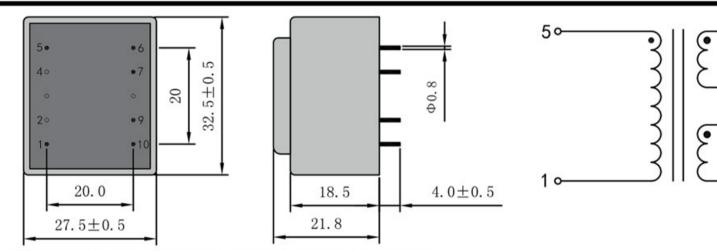

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











