

Type EI30/12.5

Power 1.5 VA

Weight 85 g

shipping unit per box: 40 PCS.

temperature class: ta 70°C/B

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL ,CE,CB certificates**

Dielectric strength 4500Vrms

| PART NO             | Output ta 70°C/B | Prim.V | Connecting pins | Operating point<br>sec. ± 10% | Connecting pins | No-load voltage<br>± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|--------------------------|
| TG3012-E-0150-090-S | 1.5W             | 230    | 1--5            | 9V 166.6mA                    | 7--9            | 13.0V                    |

Approved by

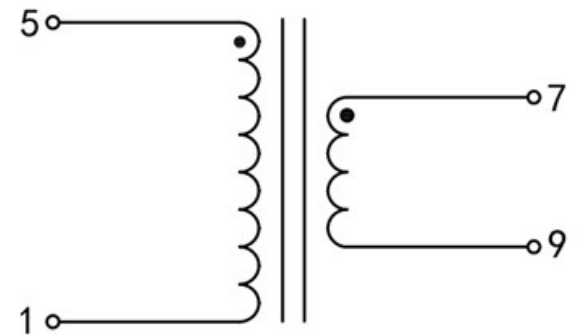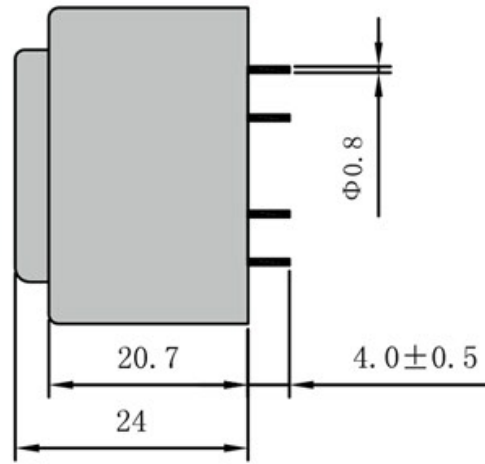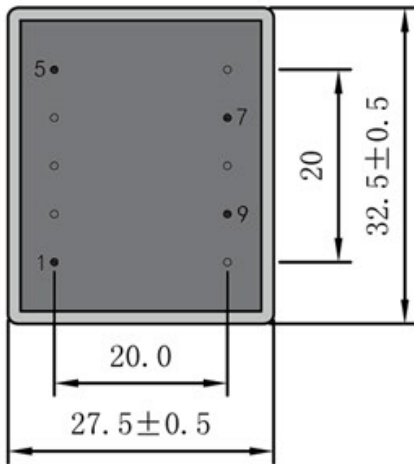

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

