

Type EI30/12.5

Power 1.5VA

Weight 85g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Safety transformer/Short circuit proof

Vacuum filled casting

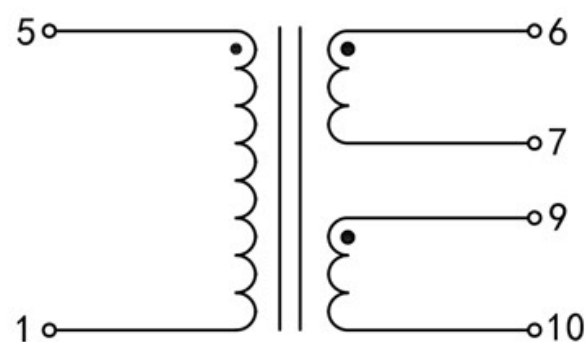
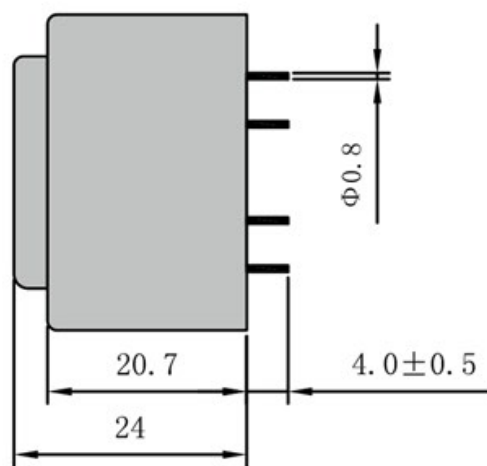
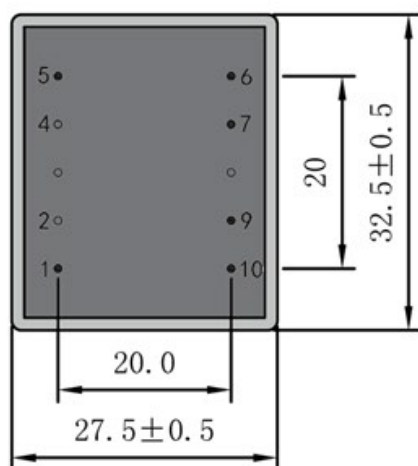
Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. $\pm 10\%$	Connecting pins	No-load voltage V $\pm 10\%$
TG3012-E-0150-240-D	1.5W	230	1--5	24V 31.2mA	6--7	35.5V
				24V 31.2mA	9--10	35.5V

Approved by


 Dimensions with no indication of tolerances: $\pm 0.3\text{mm}$
 Custom-made transformer also will be welcome.
