Weight Type EI30/12.5 Power 1.8VA 85g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 50℃/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3012-E-0180-150-D	1.8W	230	15	15V 60.0mA	67	22.0V
				15V 60.0mA	910	22.0V

Approved by














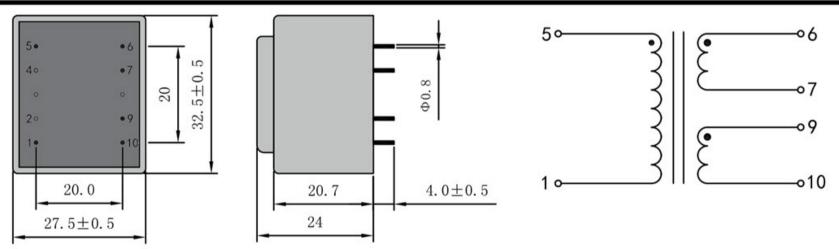

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.













