Weight Type EI30/12.5 1.5VA 85g Power

shipping unit per box: 40 PCS

temperature class: ta 70℃/B

Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3012-U2-0150-180-S	1.5W	115	12	18V 83.3mA	79	25.5V
		115	45			

Approved by














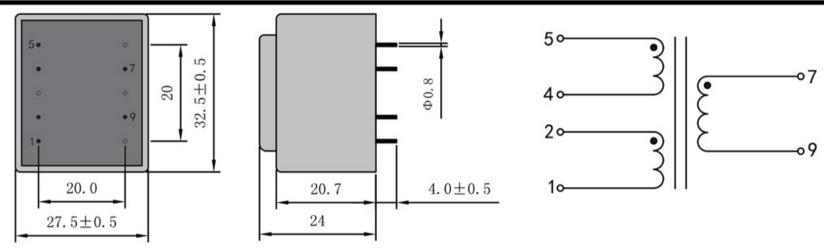

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.













