Weight 100g Type EI30/15.5 2.0 VA Power

> shipping unit per box: 40PCS. temperature class: ta 70℃/B

> > Safety transformer/Short circuit proof

Vacuum filled casting

Split bobbin design winding

with VDE, ENEC 10, UL, CE, CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 70℃/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage ± 10%
TG3015-U-0200-120-S	2.0W	115	15	12V 166.6mA	79	18.0V

Approved by














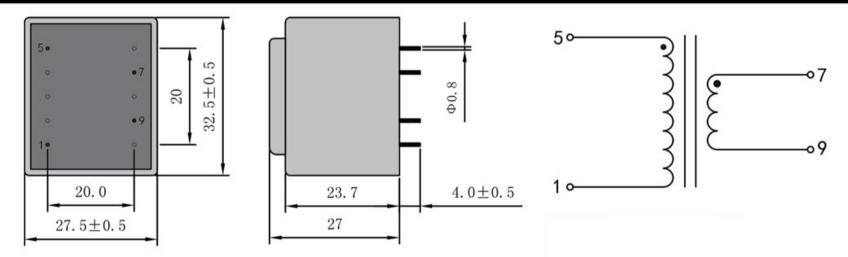

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











