

Type EI30/18

Power 2.3 VA

Weight 110g

shipping unit per box: 40 PCS.

temperature class: ta 70°C/B

Safety transformer/Short circuit proof

Vacuum filled casting




Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|--------------------------|
| TG3018-E-0230-240-S | 2.3 W | 230 | 1--5 | 24V 95.8mA | 7--9 | 35.8V |

Approved by

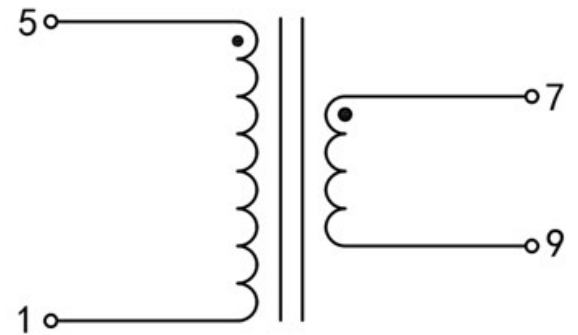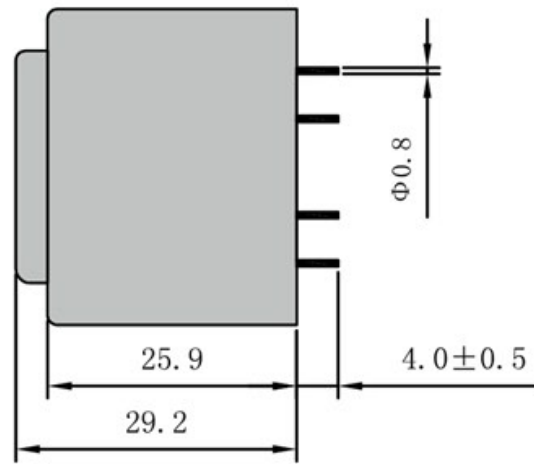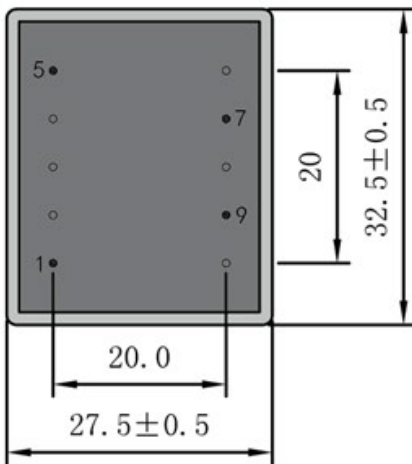

Dimensions with no indication of tolerances: ± 0.3mm
 Custom-made transformer also will be welcome.

