

Type EI30/18

Power 2.8 VA

Weight 110g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting




Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3018-U-0280-075-D	2.8W	115	1--5	7.5V 186.6mA	6--7	10.7V
				7.5V 186.6mA	9--10	10.7V

Approved by

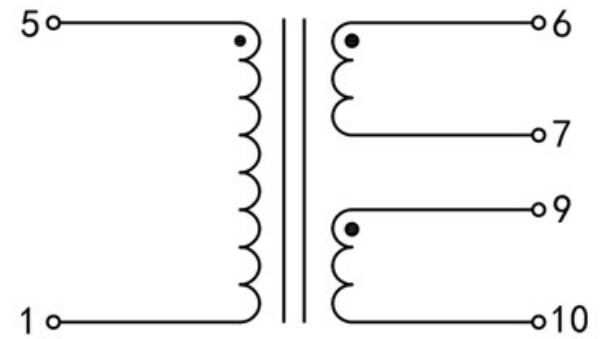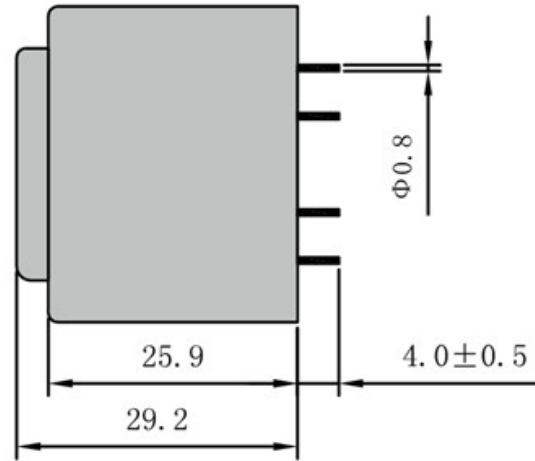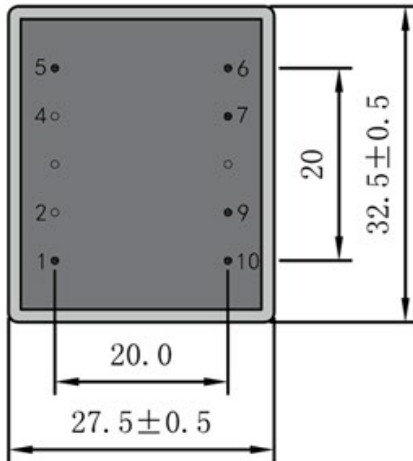

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

