

Type EI30/23

Power 3.0VA

Weight 140g

shipping unit per box: 40 PCS.

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

Vacuum filled casting




Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

| PART NO | Output ta 50°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|--------------------------|
| TG3023-E-0300-060-D | 3.0W | 230 | 1--5 | 24V 125.0mA | 7--9 | 32.4 |

Approved by

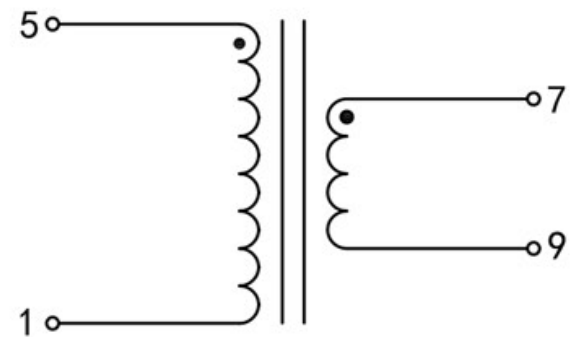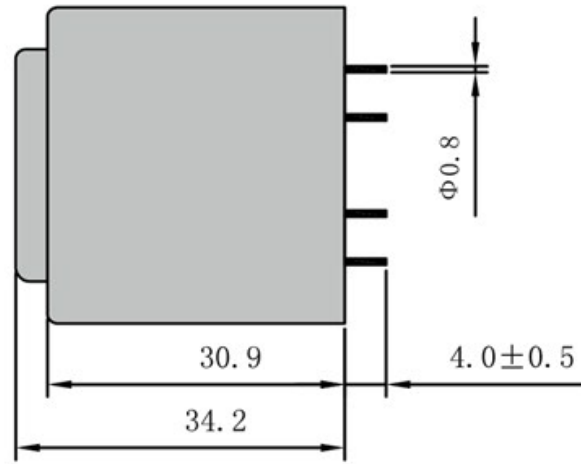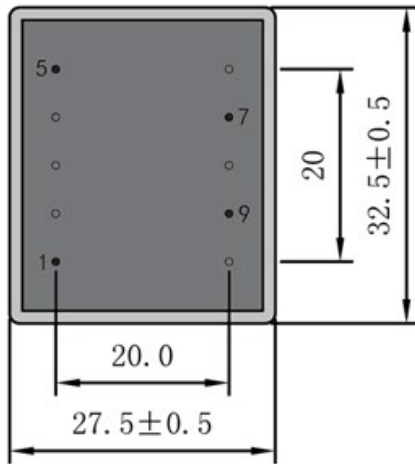

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

