

Type EI30/23

Power 3.0VA

Weight 140g

shipping unit per box: 40 PCS

temperature class: ta 50°C/B

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL ,CE,CB certificates**

Dielectric strength 4500Vrms

| PART NO              | Output ta 50°C/B | Prim.V | Connecting pins | Operating point<br>sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|----------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG3023-U2-0300-150-S | 3.0W             | 115    | 1--2            | 15V 200.0mA                   | 7--9            | 20.3V                      |
|                      |                  | 115    | 4--5            |                               |                 |                            |

Approved by

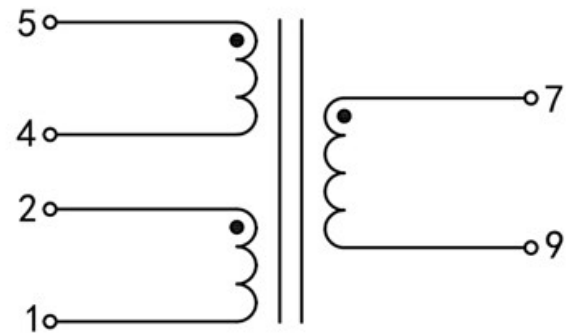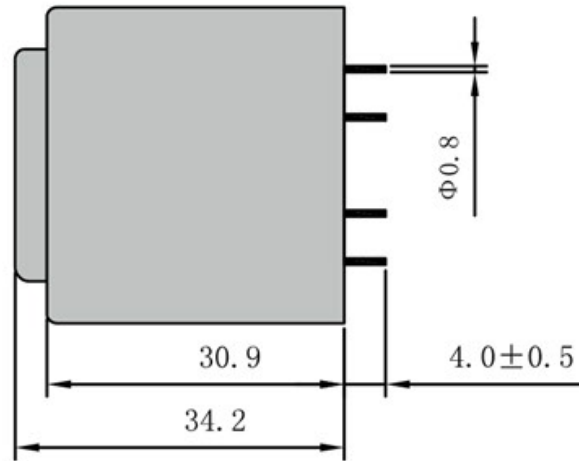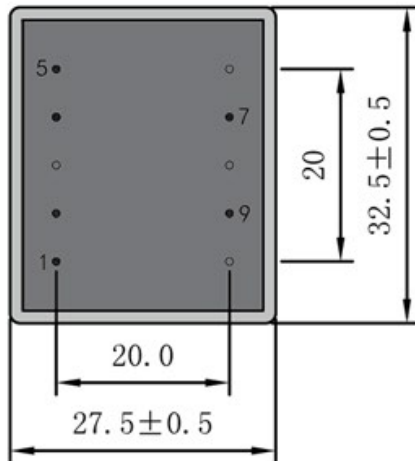

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

