

Type EI30/15.5

Power 1.8VA

Weight 100g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

**Max.standby power consumption ≤0.5W**

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL ,CE,CB certificates**

Dielectric strength 4500Vrms

| PART NO             | Output ta 70°C/B | Prim.V | Connecting pins | Operating point<br>sec. ± 10% | Connecting pins | No-load voltage<br>V ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG3015-E-0180-150-D | 1.8W             | 230    | 1--5            | 15V 60.0mA                    | 6--7            | 22.3V                      |
|                     |                  |        |                 | 15V 60.0mA                    | 9--10           | 22.3V                      |

Approved by

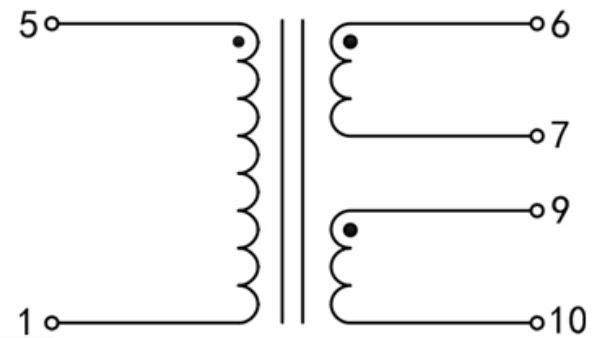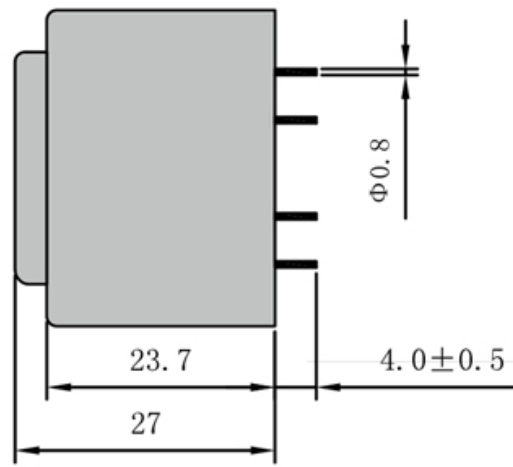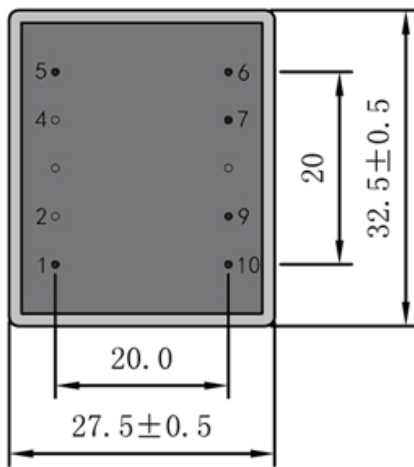

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

