

Type EI30/15.5

Power 2.0VA

Weight 100g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

**Max.standby power consumption ≤0.5W**

Safety transformer/Short circuit proof

**Vacuum filled casting**




Split bobbin design winding

**with VDE, ENEC 10, UL, CE, CB certificates**

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3015-E-0200-075-D	2.0W	230	1--5	7.5V 133.3mA	6--7	11.2V
				7.5V 133.3mA	9--10	11.2V

Approved by

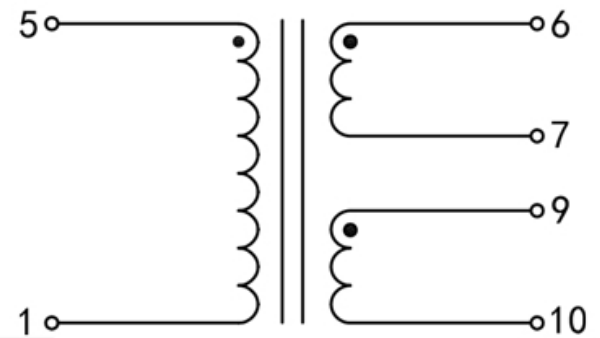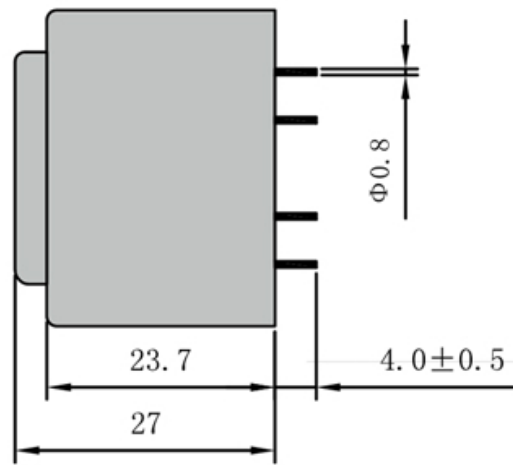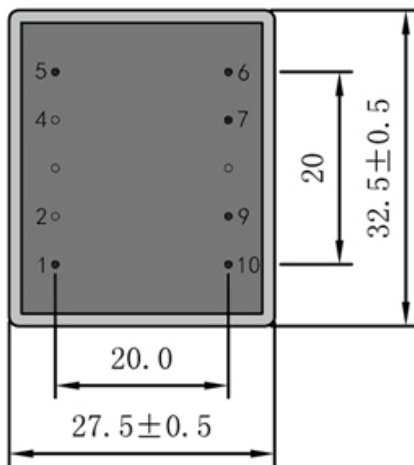

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

