

Type EI30/18

Power 2.3VA

Weight 110g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Max.standby power consumption ≤0.5W

Safety transformer/Short circuit proof

Vacuum filled casting

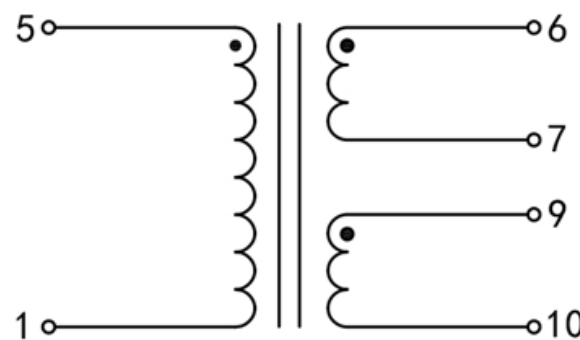
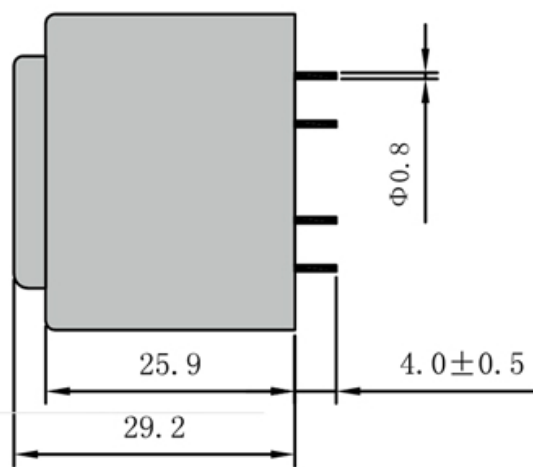
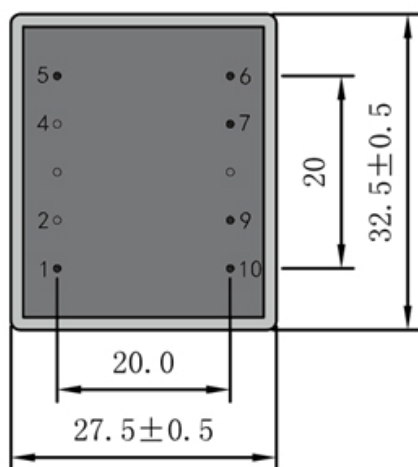
Split bobbin design winding

with VDE, ENEC 10, UL ,CE,CB certificates

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3018-E-0230-090-D	2.3W	230	1--5	9V 127.7mA	6--7	13.5V
				9V 127.7mA	9--10	13.5V

Approved by


 Dimensions with no indication of tolerances: ± 0.3mm
 Custom-made transformer also will be welcome.
