

Type EI30/23

Power 2.8VA

Weight 130g

shipping unit per box: 40 PCS

temperature class: ta 70°C/B

Max.standby power consumption ≤0.5W

Safety transformer/Short circuit proof

Vacuum filled casting




Split bobbin design winding

with VDE, ENEC 10, UL, CE, CB certificates

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG3023-E-0280-075-D | 2.8W | 230 | 1--5 | 7.5V 186.6mA | 6--7 | 10.7V |
| | | | | 7.5V 186.6mA | 9--10 | 10.7V |

Approved by

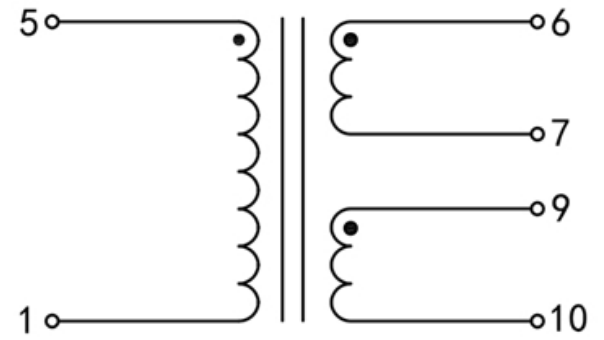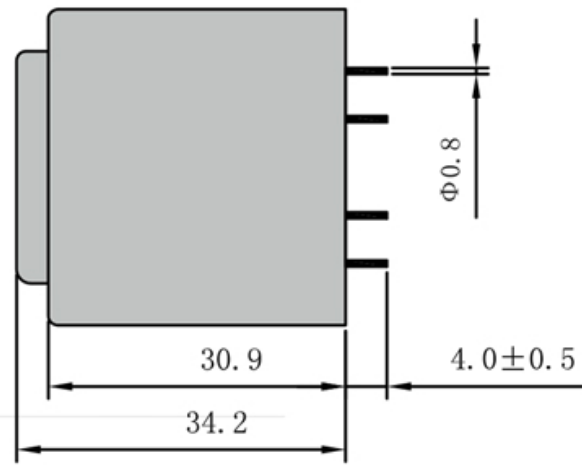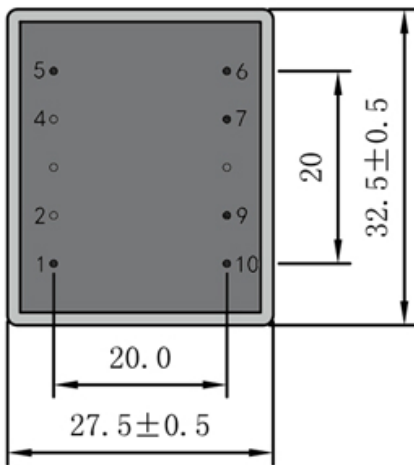

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

