

Type EI38/13.6

Power 3.2VA

Weight 150g

shipping unit per box: 25 PCS

temperature class: ta 70°C/B




Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG3813-E-0320-150-D | 3.2W | 230 | 1--5 | 15V 106.6mA | 6--7 | 20.0V |
| | | | | 15V 106.6mA | 9--10 | 20.0V |

According to

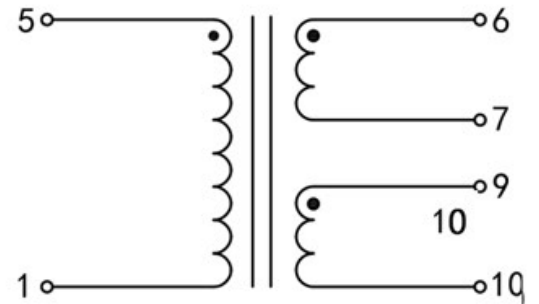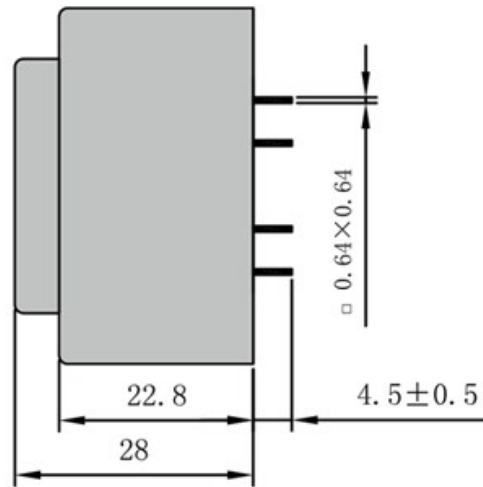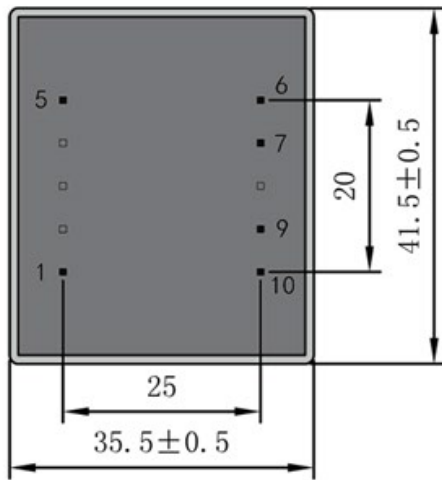

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

