

Type EI38/13.6

Power 3.2VA

Weight 150g

shipping unit per box: 25 PCS

temperature class: ta 70°C/B




**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3813-U-0320-150-D	3.2W	115	1--5	15V 106.6mA	6--7	20.0V
				15V 106.6mA	9--10	20.0V

According to

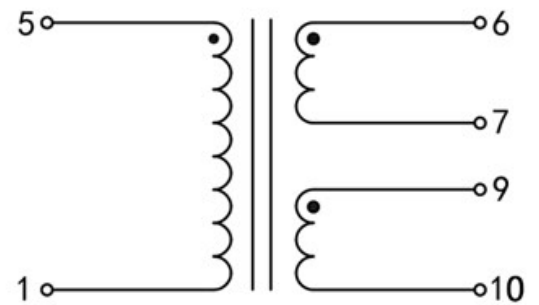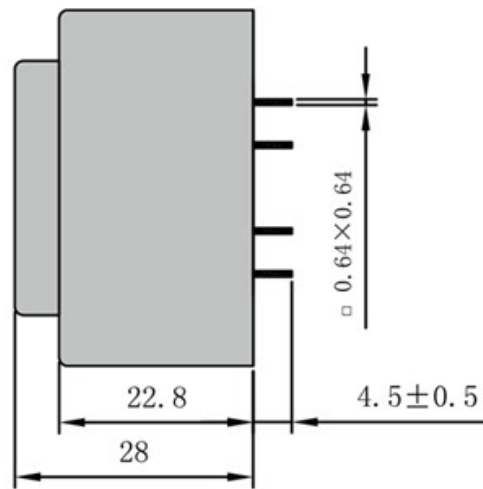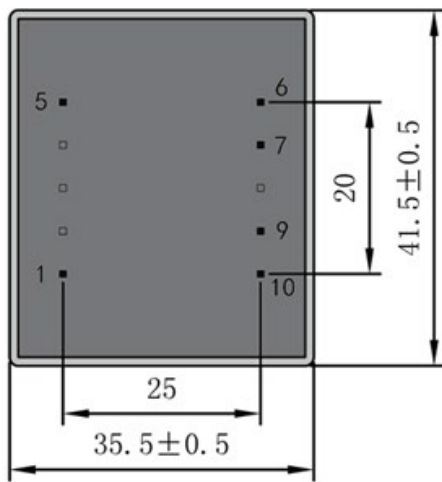

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

