Weight 150g Type EI38/13.6 3.2VA Power

> shipping unit per box: 25 PCS temperature class: ta 70℃/B

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|----------------------|------------------|--------|-----------------|----------------------------|-----------------|----------------------------|
| TG3813-U2-0320-150-S | 3.2W | 115 | 12 | 15V 213.3mA | 79 | 20.0V |
| | | 115 | 45 | | | |

According to












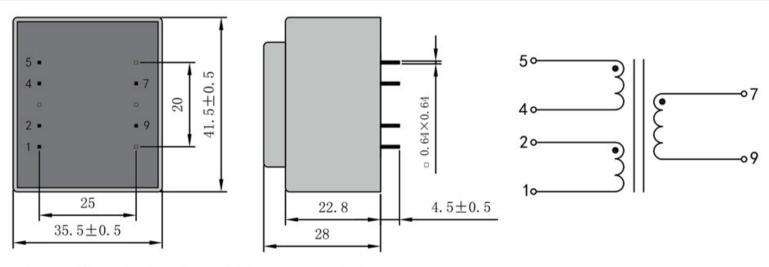

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.











