

**Type** EI42/14.8

**Power** 6.0 VA

**Weight** 200g

shipping unit per box: 25 PCS

temperature class: ta 50°C/B

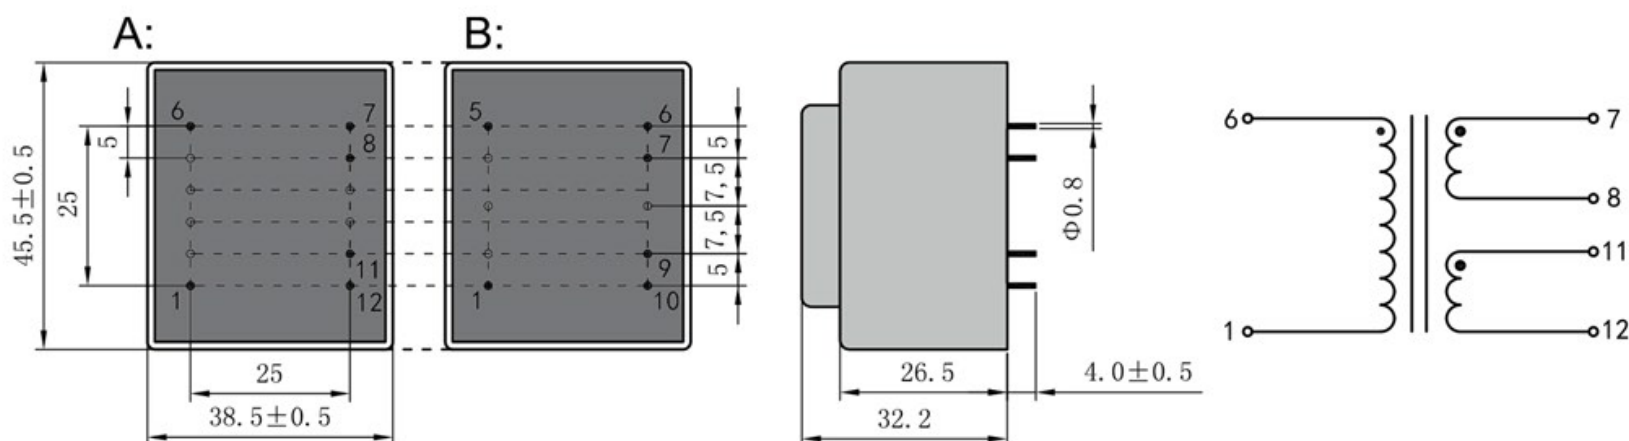
**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

| PART NO             | Output ta 50°C/B | Prim.V | Connecting pins | Operating point<br>sec. $\pm 10\%$ | Connecting pins | No-load voltage<br>V $\pm 10\%$ |
|---------------------|------------------|--------|-----------------|------------------------------------|-----------------|---------------------------------|
| TG4214-E-0600-075-D | 6.0 W            | 230    | 1--6            | 7.5V 400.0mA                       | 7--8            | 10.4V                           |
|                     |                  |        |                 | 7.5V 400.0mA                       | 11--12          | 10.4V                           |

According to


 Dimensions with no indication of tolerances:  $\pm 0.3\text{mm}$   
 Custom-made transformer also will be welcome.
