

Type EI42/14.8

Power 5.0 VA

Weight 200g

shipping unit per box: 25 PCS

temperature class: ta 70°C/B

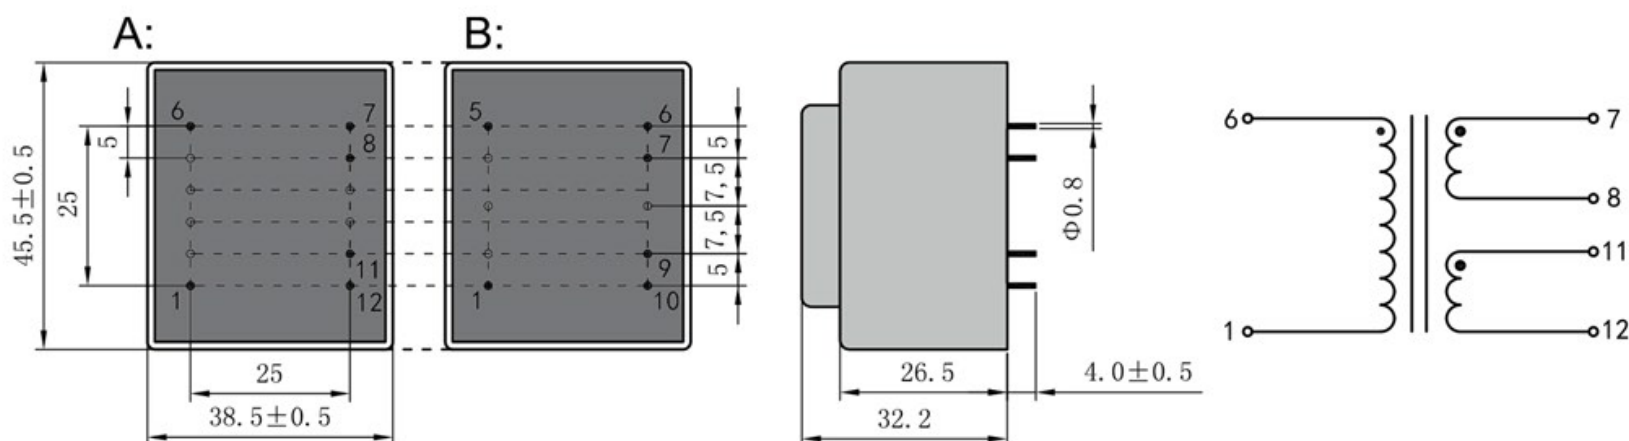
Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. $\pm 10\%$ | Connecting pins | No-load voltage V $\pm 10\%$ |
|---------------------|------------------|--------|-----------------|------------------------------------|-----------------|---------------------------------|
| TG4214-U-0500-060-D | 5.0 W | 115 | 1--6 | 6V 416.6mA | 7--8 | 7.8V |
| | | | | 6V 416.6mA | 11--12 | 7.8V |

According to


 Dimensions with no indication of tolerances: $\pm 0.3\text{mm}$
 Custom-made transformer also will be welcome.
