

Weight 200g Type EI42/14.8 Power 5.0 VA

> shipping unit per box: 25 PCS temperature class: ta 70°C/B

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG4214-U-0500-240-D	5.0 W	115	16	24V 104.1mA	78	31.2V
				24V 104.1mA	1112	31.2V

According to












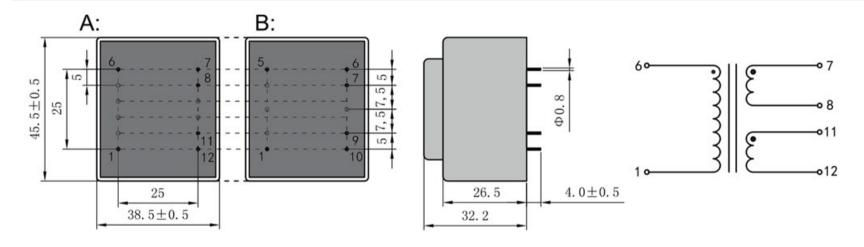

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.









