Weight 200g Type EI42/14.8 6.0 VA Power

> temperature class: ta 50°C/B shipping unit per box: 25 PCS.

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 50℃/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage ± 10%
TG4214-U-0600-240-S	6.0 W	115	16	24V 250.0mA	811	33.3V

According to












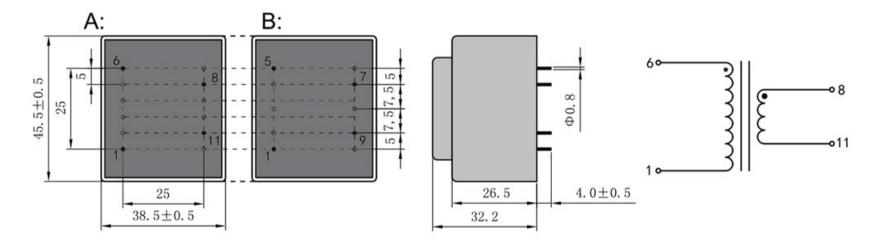

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.









