

**Type** EI42/14.8

**Power** 5.0VA

**Weight** 200g

shipping unit per box: 25 PCS

temperature class: ta 70°C/B

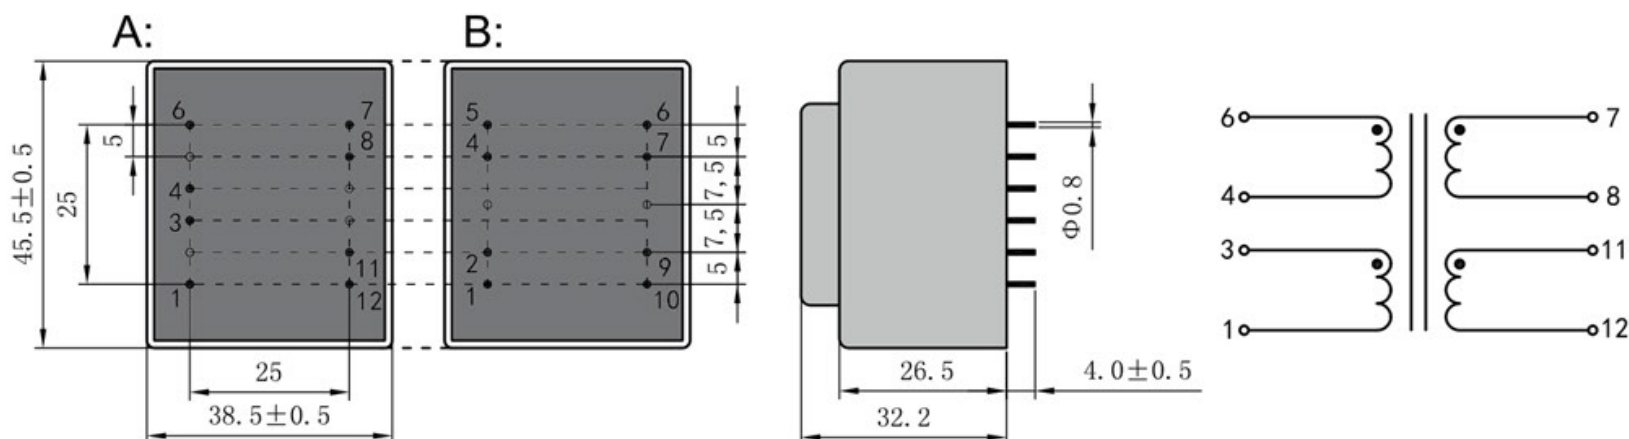
**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 70°C/B	Prim.V	Connecting pins	Operating point sec. $\pm 10\%$	Connecting pins	No-load voltage V $\pm 10\%$
TG4214-U2-0500-240-D	5.0 W	115	1---3	24V 104.1mA	7---8	31.2V
		115	4---6	24V 104.1mA	11---12	31.2V

According to


 Dimensions with no indication of tolerances:  $\pm 0.3\text{mm}$   
 Custom-made transformer also will be welcome.
