6.0VA

Power

shipping unit per box: 25 PCS

temperature class: ta 50°C/B

Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG4214-U2-0600-180-S	6.0W	115	13	18V 333.3mA	811	25.0V
		115	46			

According to












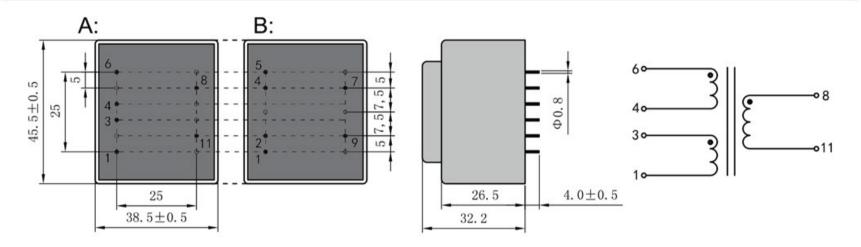

Dimensions with no indication of tolerances: ± 0.3mm Custom-made transformer also will be welcome.









