

**Type** EI42/14.8

**Power** 6.0VA

**Weight** 200g

shipping unit per box: 25 PCS

temperature class: ta 50°C/B

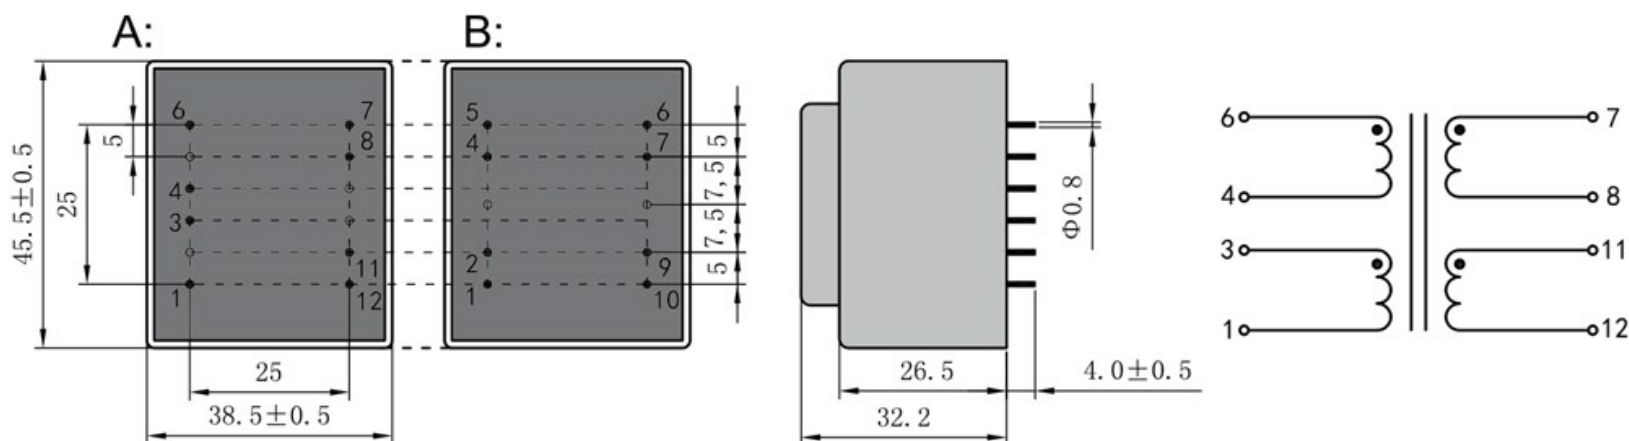
**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. $\pm 10\%$	Connecting pins	No-load voltage V $\pm 10\%$
TG4214-U2-0600-240-D	6.0 W	115	1---3	24V 125.0mA	7---8	33.3V
		115	4---6	24V 125.0mA	11---12	33.3V

According to


 Dimensions with no indication of tolerances:  $\pm 0.3\text{mm}$   
 Custom-made transformer also will be welcome.
