

Type EI42/20

Power 9.0VA

Weight 260g

shipping unit per box: 25 PCS

temperature class: ta 50°C/B




**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 4500Vrms**

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG4220-U-0900-150-D	9.0W	115	1--6	15V 300.0mA	7--8	19.5V
				15V 300.0mA	11--12	19.5V

According to

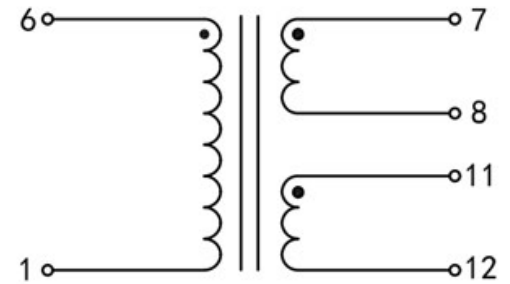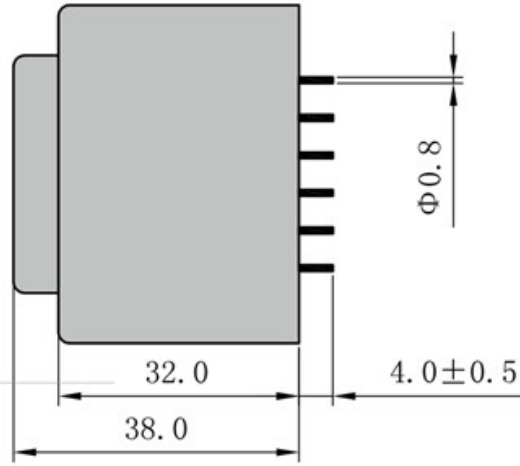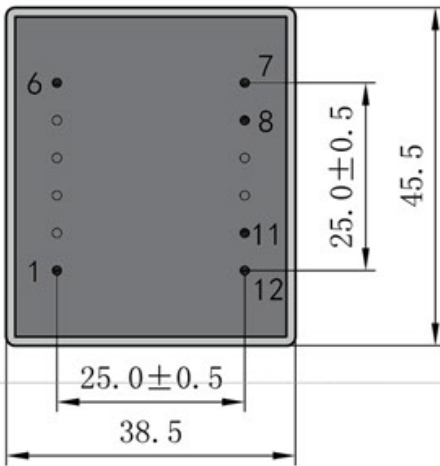

Dimensions with no indication of tolerances: ± 0.3mm  
Custom-made transformer also will be welcome.

