

Type EI60/30.5

Power 25.0VA

Weight 780g

shipping unit per box: 10 PCS

temperature class: ta 70°C/B




Vacuum filled casting

Split bobbin design winding

Dielectric strength 4500Vrms

| PART NO | Output ta 70°C/B | Prim.V | Connecting pins | Operating point sec. ± 10% | Connecting pins | No-load voltage V ± 10% |
|---------------------|------------------|--------|-----------------|-------------------------------|-----------------|----------------------------|
| TG6030-E-2500-180-D | 25.0W | 230 | 1--7 | 18V 694.4mA | 8--9 | 22.5V |
| | | | | 18V 694.4mA | 13--14 | 22.5V |

According to

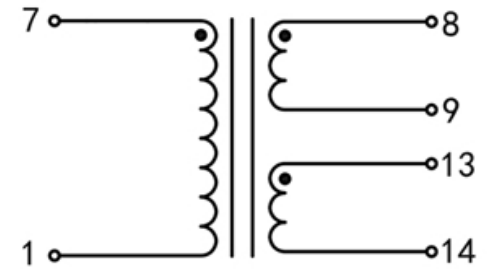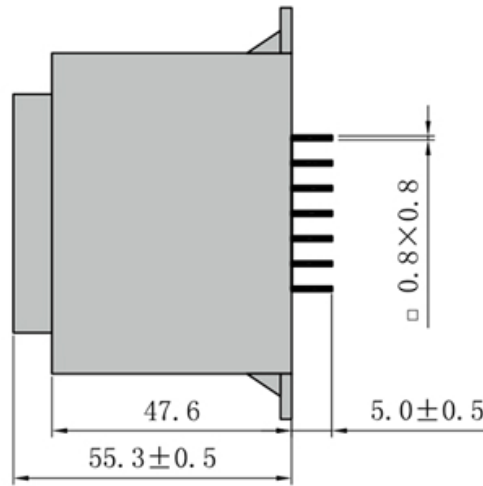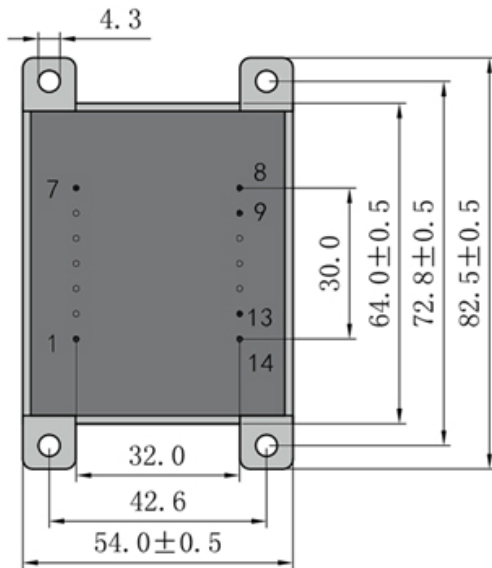

Dimensions with no indication of tolerances: ± 0.3mm
Custom-made transformer also will be welcome.

