


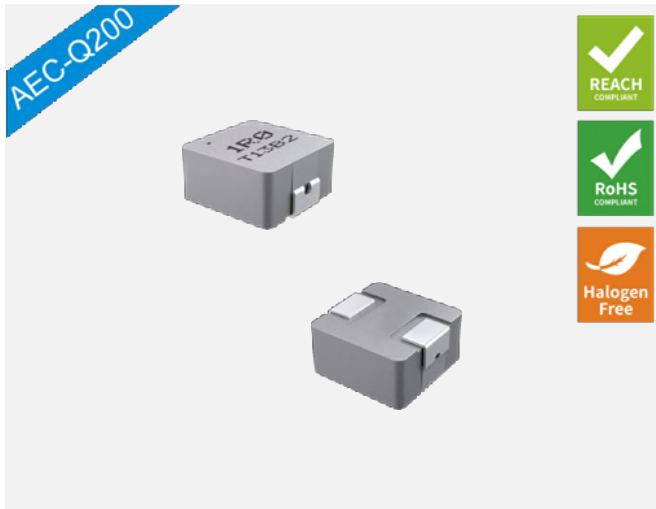

Outline:

- Magnetic shielded structure:excellent resistance to electro Magnetic interference (EMI)
- A composite structure,ultra low buzz noise
- Low loss,high efficiency,wide application frequency
- Lightweight design,save space,suitable for high density SMT

Features:

- Core material: Alloy powder
- Enviromental: RoHS, Reach compliant ,Halogen free
- Weight:5.22g
- Moisture Sensitivity:Level (MSL) 1
(unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -40°C~+125°C
(including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C

Application:

- PDA/notebook/desktop/server applications
- DC /DC converters for entertainment/navigations systems
- Noise suppresion for motors:windshield wipers/power seats/Power Mirrors/heating and ventilation blower/ HID lighting


1 Electrical Characteristics

Part No.	Inductance (μ H)※1 $\pm 20\%$	D.C.R. (m Ω)		Isat (A)※2 Typical	Irms (A) ※3 Typical
		Typical	Max		
TGBB1260A-R68M	0.68	1.00	1.20	40.0	40.0
TGBB1260A-1R0M	1.00	1.70	2.10	31.0	30.5
TGBB1260A-1R5M	1.50	2.10	2.90	28.0	27.5
TGBB1260A-2R2M	2.20	3.30	4.20	28.0	22.0
TGBB1260A-3R0M	3.00	5.10	7.60	27.0	17.5
TGBB1260A-3R3M	3.30	5.10	7.60	22.0	17.5
TGBB1260A-4R7M	4.70	6.70	10.0	20.0	15.5
TGBB1260A-5R6M	5.60	8.20	10.0	16.0	12.1
TGBB1260A-6R8M	6.80	11.6	14.0	15.0	11.8
TGBB1260A-8R2M	8.20	12.5	16.0	14.0	11.4
TGBB1260A-100M	10.0	17.4	20.7	13.0	9.60
TGBB1260A-120M	12.0	19.0	23.0	10.0	9.20
TGBB1260A-150M	15.0	23.2	29.0	8.5	8.00
TGBB1260A-180M	18.0	27.0	35.0	8.00	7.70
TGBB1260A-220M	22.0	28.5	39.5	7.50	6.80
TGBB1260A-270M	27.0	43.0	56.0	6.50	6.10
TGBB1260A-330M	33.0	47.7	75.0	6.00	5.30
TGBB1260A-470M	47.0	71.2	90.0	5.50	4.70
TGBB1260A-560M	56.0	92.3	123	5.00	4.10
TGBB1260A-680M	68.0	103	140	4.50	3.90
TGBB1260A-820M	82.0	140	170	4.00	3.30
TGBB1260A-101M	100	160	200	3.50	3.10
TGBB1260A-121M	120	180	235	3.20	2.90


All data is tested on 25°C ambient temperature

1. Inductance measure condition at 100kHz,1.0V
2. Isat:the actual value of DC current when the inductance decrease 30% of its initial value
3. Irms:the actual value of DC current when the temperature rise is $\Delta T 40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$)

2 Product Dimensions (mm)

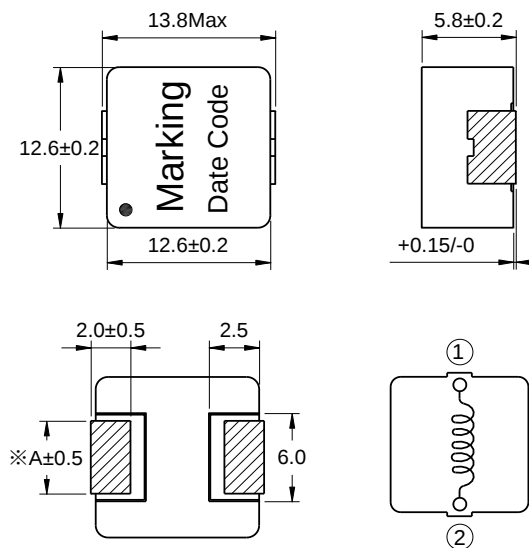

Part No.○	2R2, 3R0, 3R3, 4R7,5R6○	Others○
Dimension A○	3.00○	3.70○

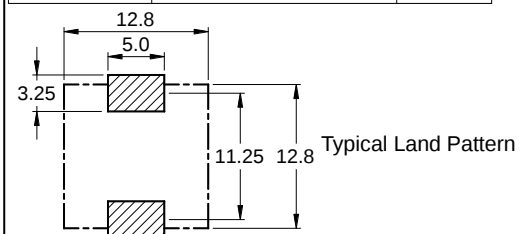

3 How to Order:


TGBB1260A-470M




Model _____

Dimensions _____

Value Code _____

4 Saturation Current vs Temperature Rise Current Curve

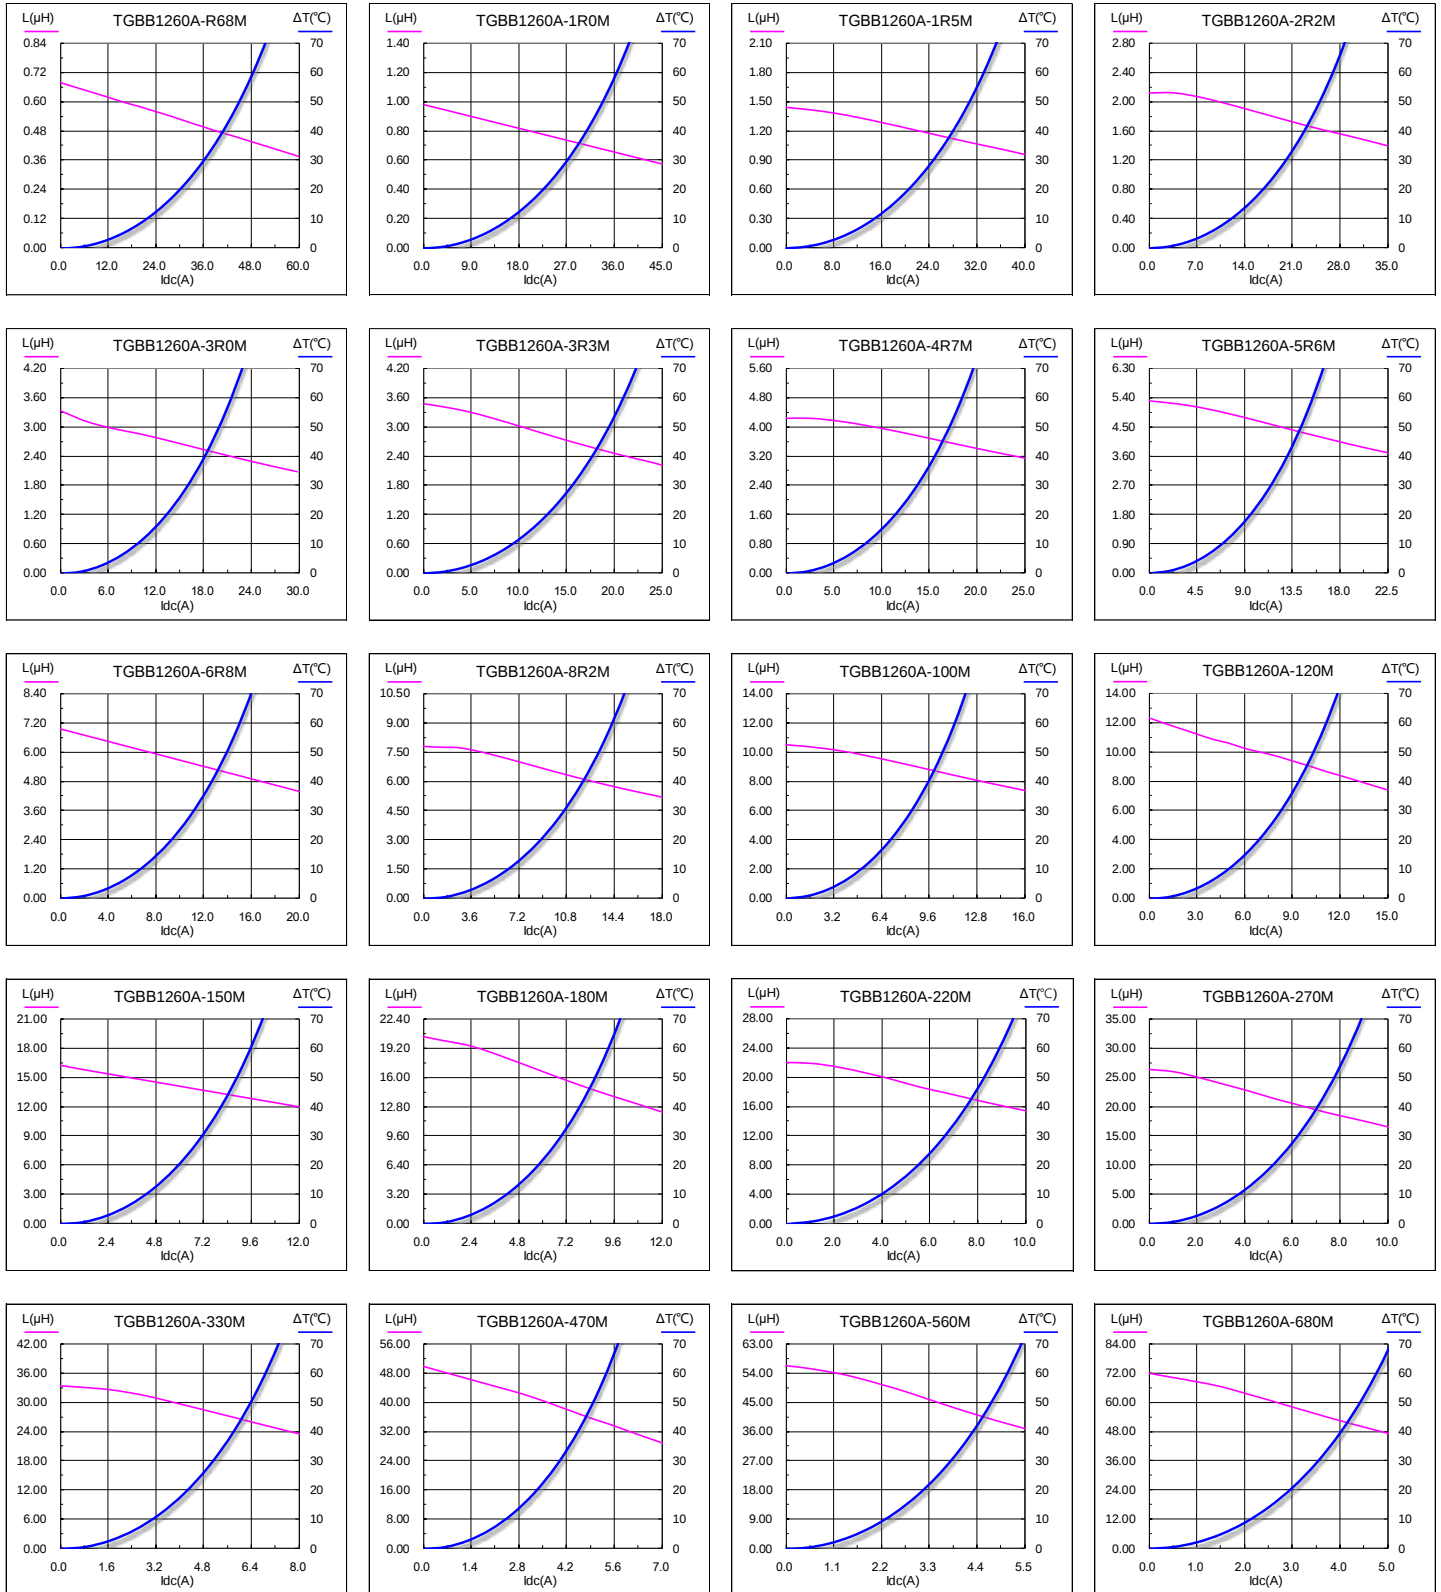



5.1 Carrier Tape Dimensions (mm)



Cover tape peeling off condition

- Cover tape peeling force shall be 0.1 to 1.3N.
- Reference peeling speed $300 \pm 10 \text{ mm/min}$.


The diagram illustrates the cover tape peeling process in two stages. The top stage shows a circular reel with a label and a cover tape being peeled off by a sprocket. Labels include 'Label', 'Cover tape', 'Sprocket', and 'Unreeling direct'. A curved arrow indicates the transition to the bottom stage. The bottom stage is a detailed view of the peeling angle, showing the 'Cover tape' being pulled at an angle of $165^\circ \sim 180^\circ$ relative to the 'Unreeling direction'. The 'Pull direction' is indicated by an arrow pointing left. The 'Carrier tape' is shown as a series of rectangular blocks at the bottom.

■ Out Carton : 355×355×385mm

Anhui Tiger Co., Ltd

6 Soldering Specification

6.1 Reflow Profile for SMT Components

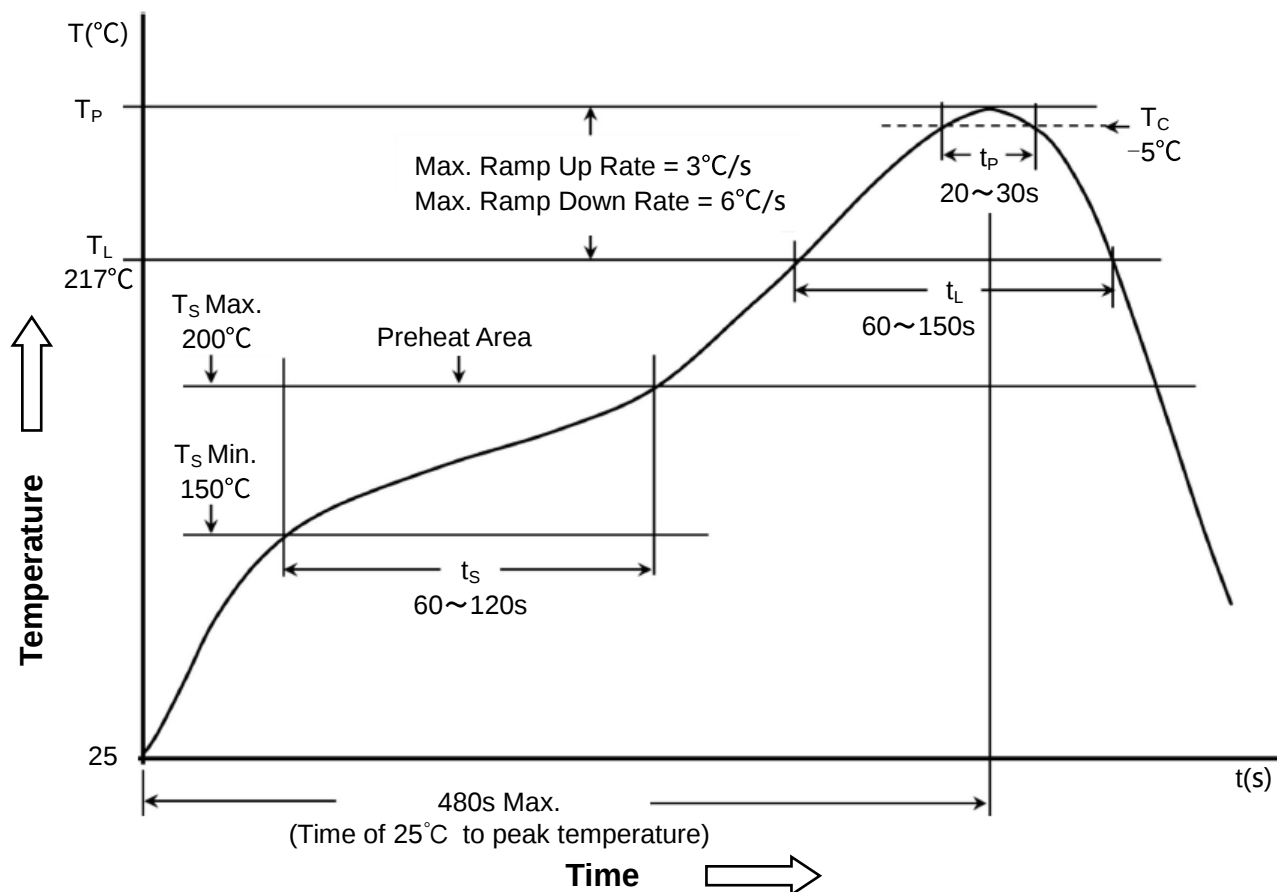

6.2 Classification of Peak Package Body Temperature (T_P)

	Package Thickness	Package Volume		
		<350 mm ³	350~2000 mm ³	>2000 mm ³
PB-Free Assembly	<1.6mm	260°C	260°C	260°C
	1.6~2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020D.

7 Notice of Use

- 7.1 Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 7.2 Product in packing storage condition: temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 7.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 7.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 7.5 Always handle products with care.
- 7.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 7.7 When this product will be used on a similar or new project to the original one, sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 7.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 7.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 7.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 7.11 Refrain from rinsing coils. If necessary, please consult with us.