



Outline:

- 12.5x 12.5mm Max.(L x W),8.3mm Max.Height
- Carrier tape packing, suitable for SMT process
- Low DCR and excellent current handling
- Magnetically shielded construction
- In addition to the standard versions of inductors shown here custom inductors are available to meet your exact requirements

Features:

- Core material:Ferrite
- Environmental: RoHS, Reach compliant ,Halogen free
- Weight:4.20g
- Moisture Sensitivity:Level (MSL) 1
(unlimited floor life at <30°C / 85% relative humidity).
- Operating temperature range: -40°C~+125°C
(including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C


Application:

- Ideally used in Notebook PC,LCD T,Game machine STB
- buck converter,network communication equipment, and etc

1 Electrical Characteristics








Part No.	Inductance (μ H)※1	D.C.R. (m Ω)		Isat (A)※2	Irms (A) ※3
		Typical	Max		
TGICS127-6R8N	6.80 $\pm$ 30%	20.3	24.4	12.0	5.23
TGICS127-8R2N	8.20 $\pm$ 30%	22.2	26.6	10.9	5.08
TGICS127-100M	10.0 $\pm$ 20%	24.1	28.9	10.2	4.95
TGICS127-120M	12.0 $\pm$ 20%	28.6	34.3	9.00	4.61
TGICS127-150M	15.0 $\pm$ 20%	31.0	37.2	8.40	4.49
TGICS127-180M	18.0 $\pm$ 20%	32.9	39.5	7.80	4.42
TGICS127-220M	22.0 $\pm$ 20%	38.0	45.6	7.00	4.17
TGICS127-270M	27.0 $\pm$ 20%	43.0	51.6	6.20	3.97
TGICS127-330M	33.0 $\pm$ 20%	48.5	58.2	5.50	3.74
TGICS127-390M	39.0 $\pm$ 20%	60.8	73.0	5.20	3.34
TGICS127-470M	47.0 $\pm$ 20%	70.0	84.0	4.60	3.11
TGICS127-560M	56.0 $\pm$ 20%	75.4	90.5	4.30	3.00
TGICS127-680M	68.0 $\pm$ 20%	94.8	114	3.90	2.67
TGICS127-820M	82.0 $\pm$ 20%	105	126	3.60	2.54
TGICS127-101M	100 $\pm$ 20%	137	164	3.20	2.22
TGICS127-121M	120 $\pm$ 20%	176	211	2.90	1.96
TGICS127-151M	150 $\pm$ 20%	202	242	2.60	1.83
TGICS127-181M	180 $\pm$ 20%	258	310	2.40	1.62
TGICS127-221M	220 $\pm$ 20%	288	346	2.20	1.53
TGICS127-271M	270 $\pm$ 20%	370	444	2.00	1.35
TGICS127-331M	330 $\pm$ 20%	410	492	1.80	1.29
TGICS127-391M	390 $\pm$ 20%	508	610	1.65	1.15
TGICS127-471M	470 $\pm$ 20%	630	756	1.45	1.04
TGICS127-561M	560 $\pm$ 20%	760	912	1.35	0.94
TGICS127-681M	680 $\pm$ 20%	954	1,145	1.20	0.84
TGICS127-821M	820 $\pm$ 20%	1,065	1,278	1.10	0.80
TGICS127-102M	1,000 $\pm$ 20%	1,315	1,578	1.00	0.71

2 Product Dimensions (mm)

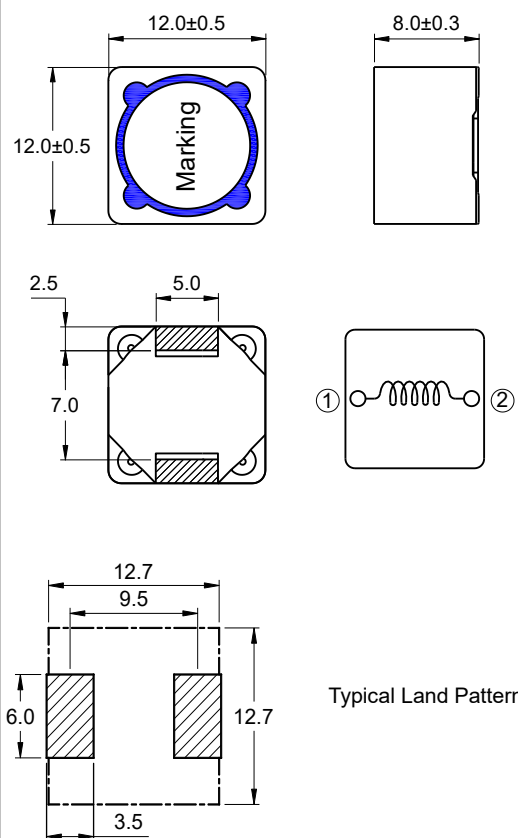


All data is tested on 25°C ambient temperature

1. Inductance measure condition at 100kHz,0.1V
2. Isat:the actual value of DC current when the Inductance decrease 20% of its initial value
3. Irms:the actual value of DC current when the the temperature rise is $\Delta T40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$)




4 Packing Specification

4.1 Carrier Tape Dimensions (mm)

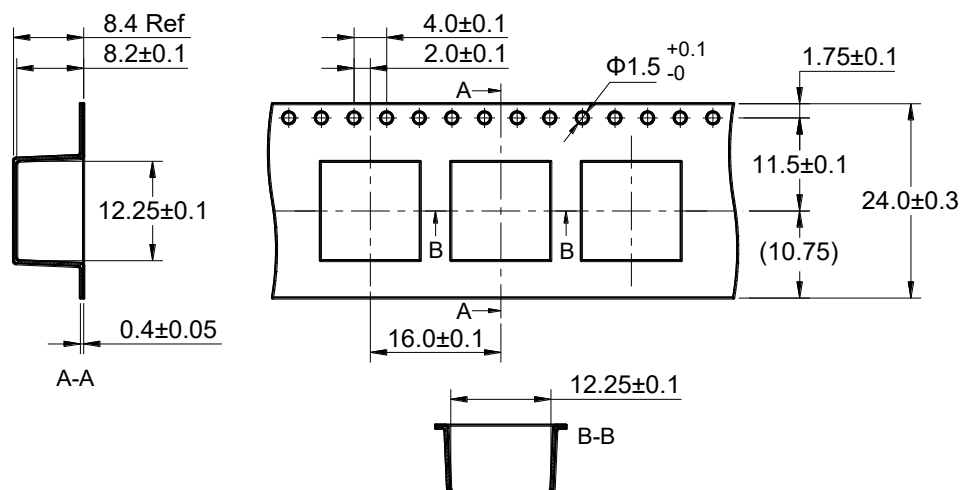

※ Packing is referred to the international standard IEC 60286-3.

4.2 Reel Dimensions (mm)

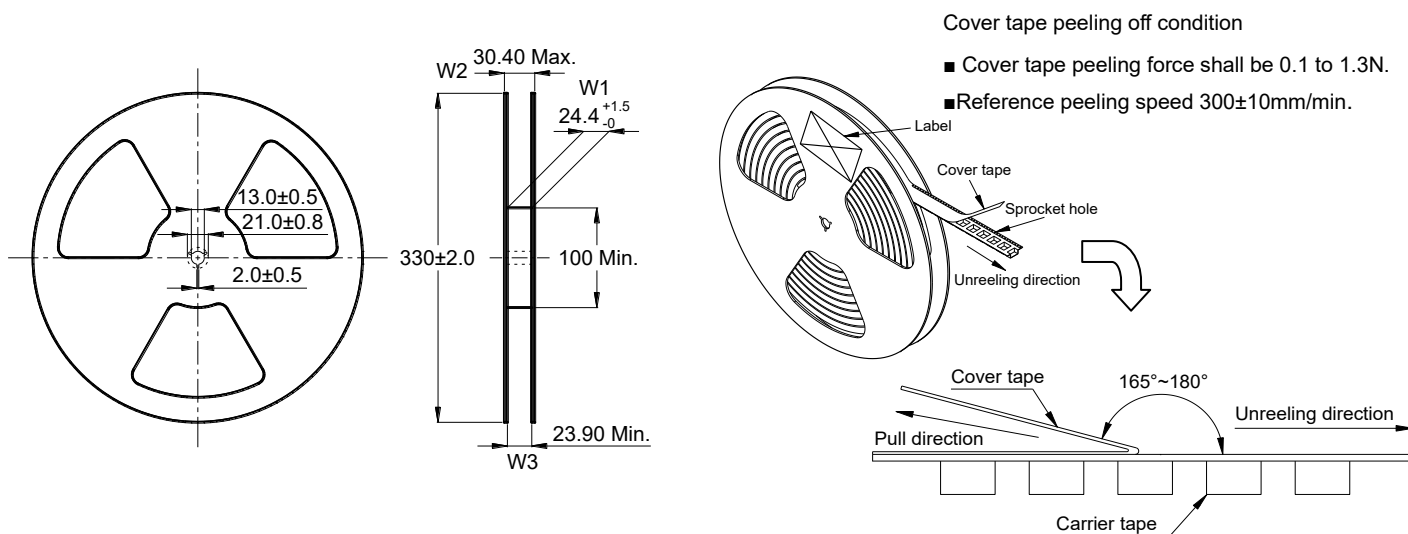

4.3 Carton Dimensions and Packing Quantity


■ Inner Carton: 340×340×95mm

■ Out Carton : 355×355×385mm

Product Series	Quantity / Reel	Inner Carton Quantity	Out Carton Quantity
TGICS127	500pcs	$(500 \times 3) = 1500\text{pcs}$	$(1500 \times 2) = 3000\text{pcs}$

5 Soldering Specification

5.1 Reflow Profile for SMT Components

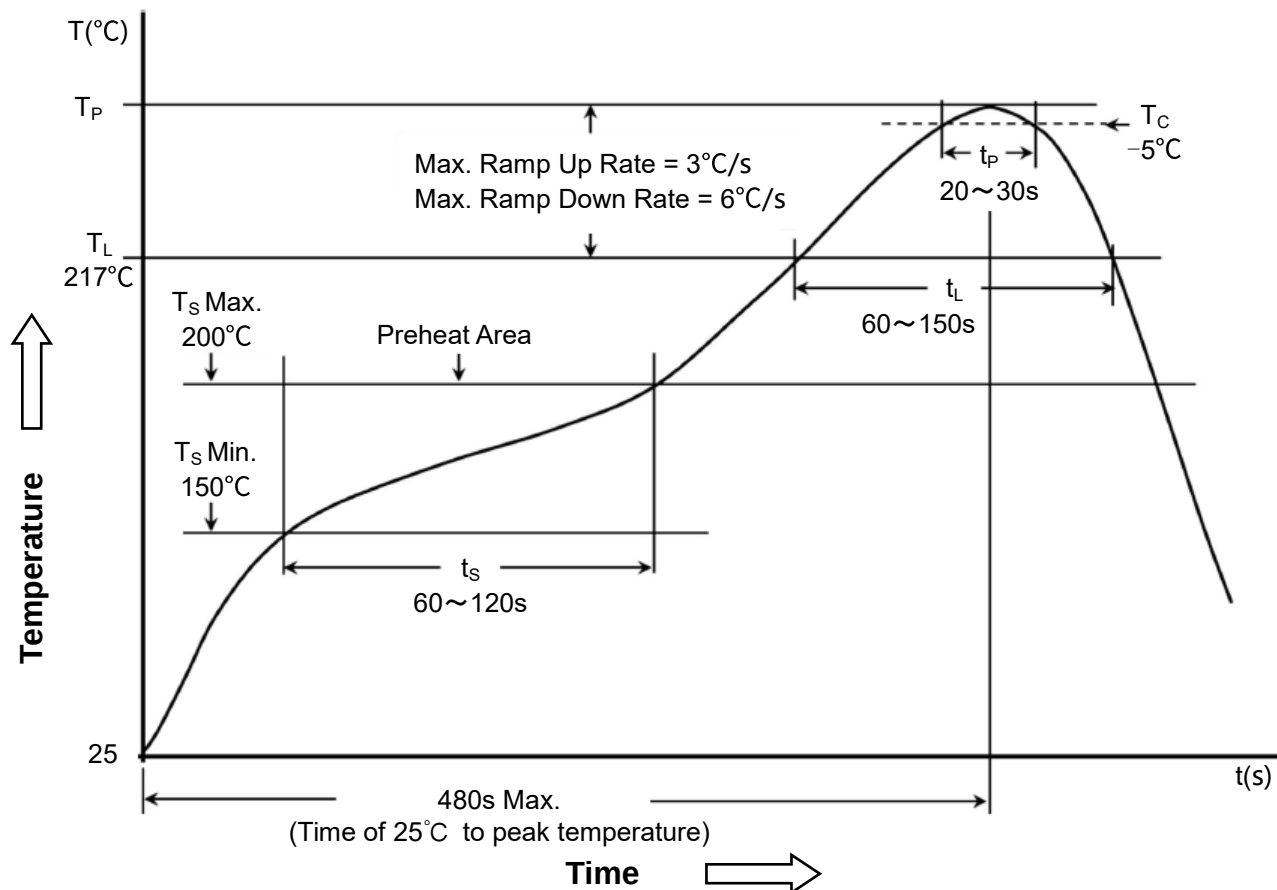

5.2 Classification of Peak Package Body Temperature (T_{P})

	Package Thickness	Package Volume		
		$<350 \text{ mm}^3$	$350 \sim 2000 \text{ mm}^3$	$>2000 \text{ mm}^3$
PB-Free Assembly	$<1.6\text{mm}$	260°C	260°C	260°C
	$1.6 \sim 2.5\text{mm}$	260°C	250°C	245°C
	$\geq 2.5\text{mm}$	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020D.

6 Notice of Use

- 6.1 Special remind:Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.
- 6.2 Product in packing storage condition:temperature 5~40°C, RH≤70%.
If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of terminals (electrodes), affecting soldering status.
- 6.3 A storage of Codaca Electronic products for longer than 12 months is not recommended, Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- 6.4 Do not keep products in unsuitable storage conditions, such as areas susceptible to high temperatures, high humidity, dust or corrosion.
- 6.5 Always handle products with care.
- 6.6 Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- 6.7 When this product will be used on a similar or new project to the original one,
sometimes it might be unable to satisfy the specifications due to different condition of usage.
- 6.8 This inductor itself does not have any protective function in abnormal condition, such as overload, short-circuit, open-circuit conditions, etc. Therefore, it shall be confirmed that there is no risk of smoke, fire, dielectric withstand voltage, insulation resistance, etc., or use in abnormal conditions protective devices or protection circuit in the end product.
- 6.9 Hi-Pot test with higher voltage than spec value will damage insulating material and shorten its life.
- 6.10 If using in potting compound, the magnet wire coating might be damaged, please consult with us.
- 6.11 Refrain from rinsing coils. If necessary, please consult with us.