

Type **UI30/5.5**

Power **2.0 VA**

Weight **125g**

shipping unit per box: **18 pcs**      temperature class: **ta 50°C/B**


**Vacuum filled casting**

Split bobbin design winding


**Dielectric strength 3750Vrms**

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3005-U2-0200-180-D	2.0 W	115	1---3	18V 55.5mA	10---12	30.6V
		115	5---7	18V 55.5mA	14---16	30.6V

According to

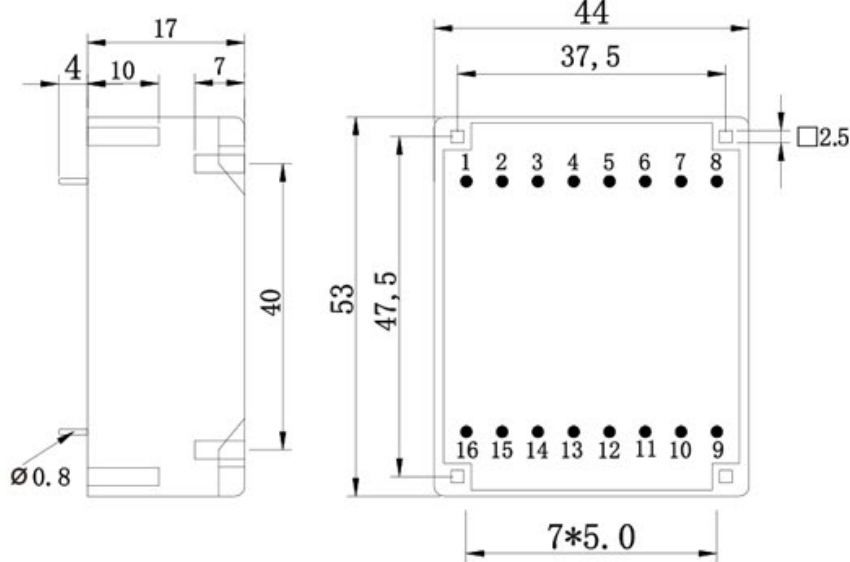

**Schematics**

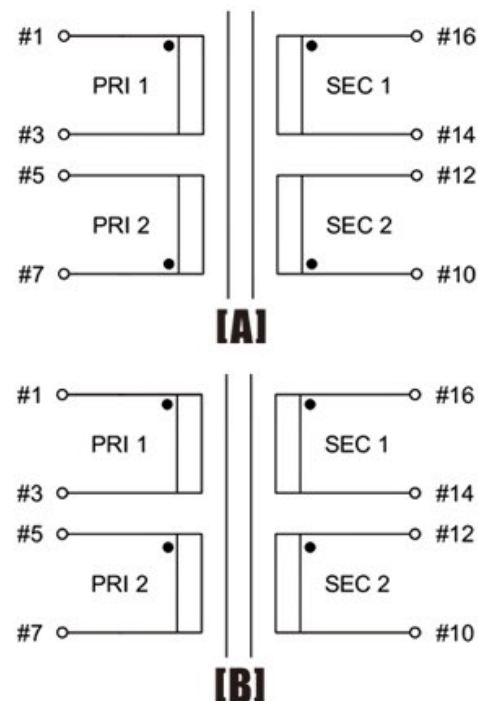

Tolerances : <10mm ±0.3mm  
10--50mm ±0.5mm  
Custom-made transformer also will be welcome.

