

Type **UI30/10.5**

Power **6.0 VA**

Weight **185g**

shipping unit per box: **18 pcs** temperature class: **ta 50°C/B**


Vacuum filled casting

Split bobbin design winding


Dielectric strength 3750Vrms

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3010-U2-0600-180-D	6.0 W	115	1---3	18V 166.6mA	10---12	24.3V
		115	5---7	18V 166.6mA	14---16	24.3V

According to

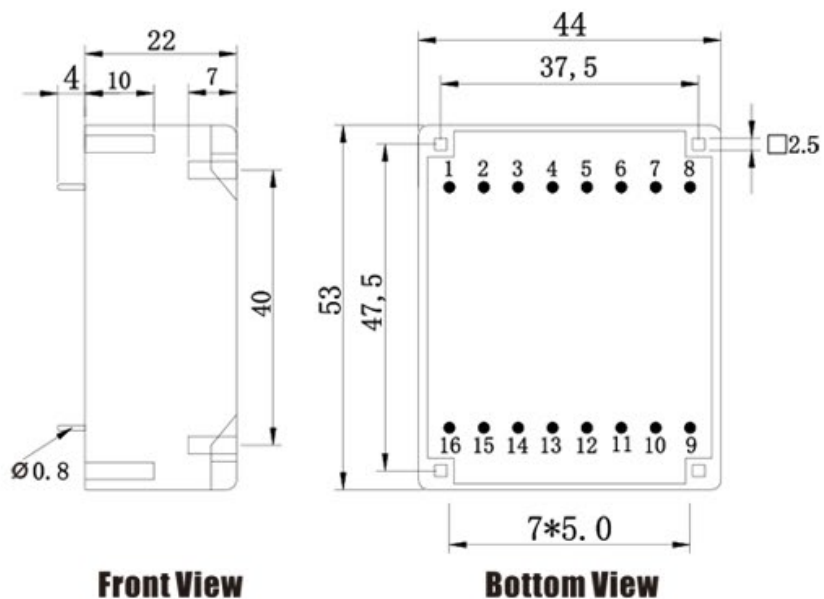

Schematics

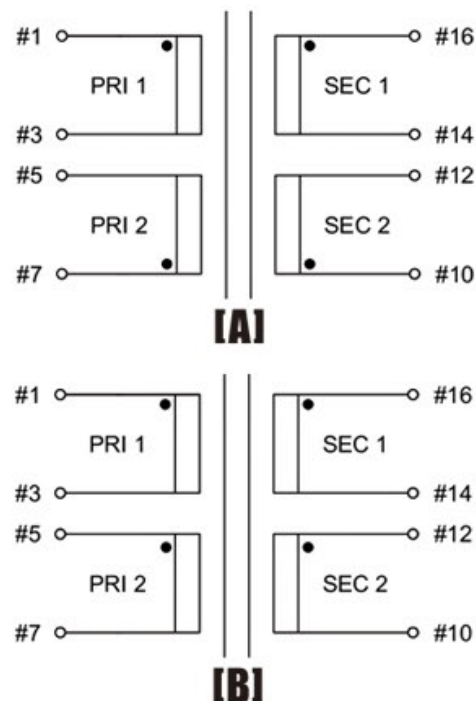

Tolerances : <10mm ±0.3mm
10--50mm ±0.5mm
Custom-made transformer also will be welcome.

