

Type **UI30/16.5**

Power **10.0 VA**

Weight **260g**

shipping unit per box: **18 pcs**      temperature class: **ta 50°C/B**


**Vacuum filled casting**

Split bobbin design winding


**Dielectric strength 3750Vrms**

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3016-U2-1000-150-D	10.0 W	115	1---3	15V 333.3mA	10---12	19.8V
		115	5---7	15V 333.3mA	14---16	19.8V

According to

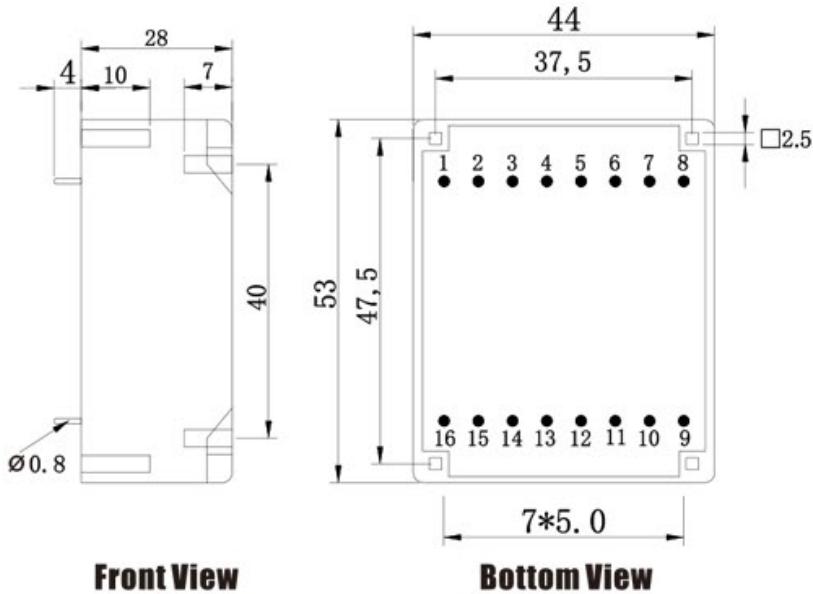

**Schematics**

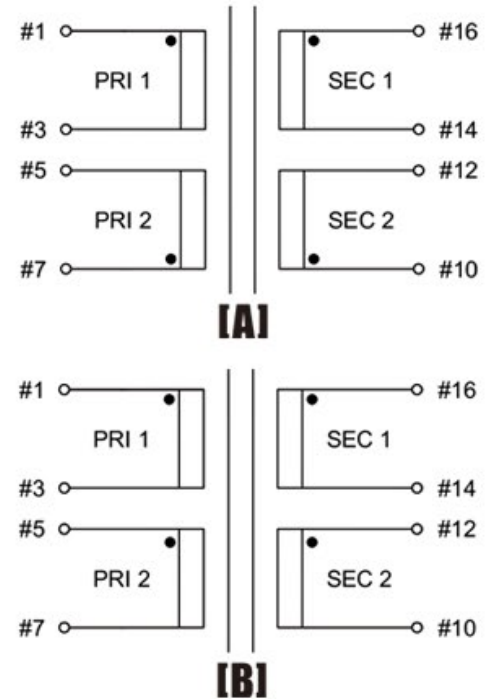

Tolerances : <10mm ±0.3mm  
10--50mm ±0.5mm  
Custom-made transformer also will be welcome.

