

Type **UI30/16.5**

Power **10.0 VA**

Weight **260g**

shipping unit per box: **18 pcs**      temperature class: **ta 50°C/B**


**Vacuum filled casting**

Split bobbin design winding

**Dielectric strength 3750Vrms**

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
TG3016-U2-1000-240-D	10.0 W	115	1---3	24V 208.3mA	10---12	31.7V
		115	5---7	24V 208.3mA	14---16	31.7V

According to

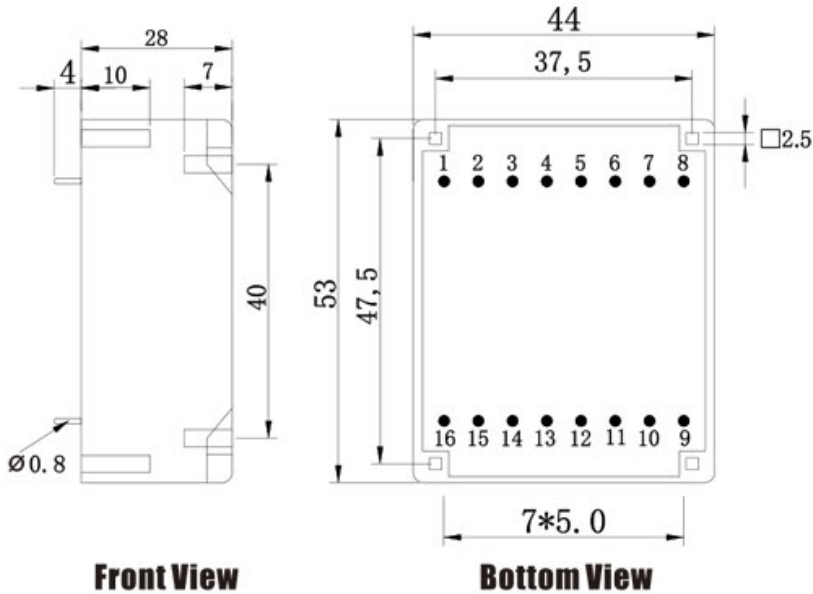

**Front View**

**Bottom View**

Tolerances : <10mm ±0.3mm  
10--50mm ±0.5mm

Custom-made transformer also will be welcome.

**Schematics**

